

MTC2 R7

Multi-purpose winding testers



PUSHING. PRECISION. FURTHER.

The next level of surge testing!

With the MTC2 R7, SCHLEICH has redefined speed and precision in surge and partial discharge testing – no other test device offers greater performance and versatility.

The MTC2 R7 is the high-end device for testing all types of coils, stators, armatures and winding goods. Thanks to modular configuration and extensibility, fully automated, comprehensive testing of all types of winding goods is finally becoming a reality.


The integration of so many different test methods in one device is unparalleled. The MTC2 R7 offers a clear, straightforward display of the tests and the intuitive operating concept simplifies the daily testing schedule.

State-of-the-art hardware technologies paired with cutting-edge .NET Core software are utilized. This increases the accuracy of the individual test methods and the measuring speed substantially.

More than 35 years of experience, extensive know-how and innovative technological advancements are the foundation for the latest generation of our surge voltage testers.



- > Surge voltage up to 50 kV
- > Testing of motors and generators up to 500 MW
- > 2000 A surge current
- > 125 joules surge energy
- > Rise time up to 60 ns
- > Automatic test method switch-over
- > Patented evaluation methods
- > High-speed measurement cycles



MTC2 R7

SPEED AND PRECISION REDEFINED

> SCHLEICH PATENT NO. 1

The surge voltage test can be performed with a pulse frequency of up to 50 Hz. The time required to measure the partial discharge inception voltage can thus be reduced by up to 75 %. This results in a significantly shorter overall test duration and allows for reduced cycle times in automated applications.

> SCHLEICH-PATENT NO. 2

The SCHLEICH "Peak-to-Peak" method for the detection of voltage-dependent winding faults has been completely revised and allows for highly sensitive fault detection even on coils with a very large number of windings, which are connected in series or parallel. Fault analysis on very large devices under test as well as motor repair applications are considerably simplified and the time required for troubleshooting is reduced to a minimum.

The test methods

The MTC2 R7 combines all test methods in one device. This gives you a tool that can be used to test winding goods for all possible faults.

By combining the versatile test methods with our patented and award-winning innovations, the quality of your products and services is ensured.

1 Surge voltage test

The unique surge voltage test is used to inspect the insulation within a winding. It is perfectly suited for testing winding faults and phase-to-phase faults as well as many other winding characteristics. In addition, insulation problems relating to the laminated core can also be tested.

2 Partial discharge test with surge voltage

The partial discharge test is used to evaluate and test the insulation system between the phases and/or to the laminated core. The partial discharge test is of particular significance for motors that are operated using frequency converters.

3 Insulation resistance test

The insulation resistance between the phases and/or to the laminated core must be equal to or greater than the given minimum value.

- PI/DAR
- Step voltage test

4 Resistance test

When testing the winding resistance using the 4-wire method, the winding resistance must be within a specified tolerance range. The MTC2 R7 compensates the influence of temperature on the measurement result.

5 Inductance & capacity test

Inductance and capacitance measurement which can be switched to the measurement connections fully automatically.

6 High voltage test AC

High voltage AC ensures the dielectric strength between the phases and/or the laminated core in accordance with applicable standards.

7 High voltage test DC


Dielectric strength test with HV DC for inspection between phases and/or to the laminated core.

8 Partial discharge test at high voltage AC

The partial discharge test is used to evaluate the insulation system between phases and/or to the laminated core. Defects such as a wire touching the laminated core can be found by this method.

9 Sense of rotation test

The MTC2 R7 supplies the stator with three-phase current. Sensors measure the rotating field contact-free and detect faulty circuits.

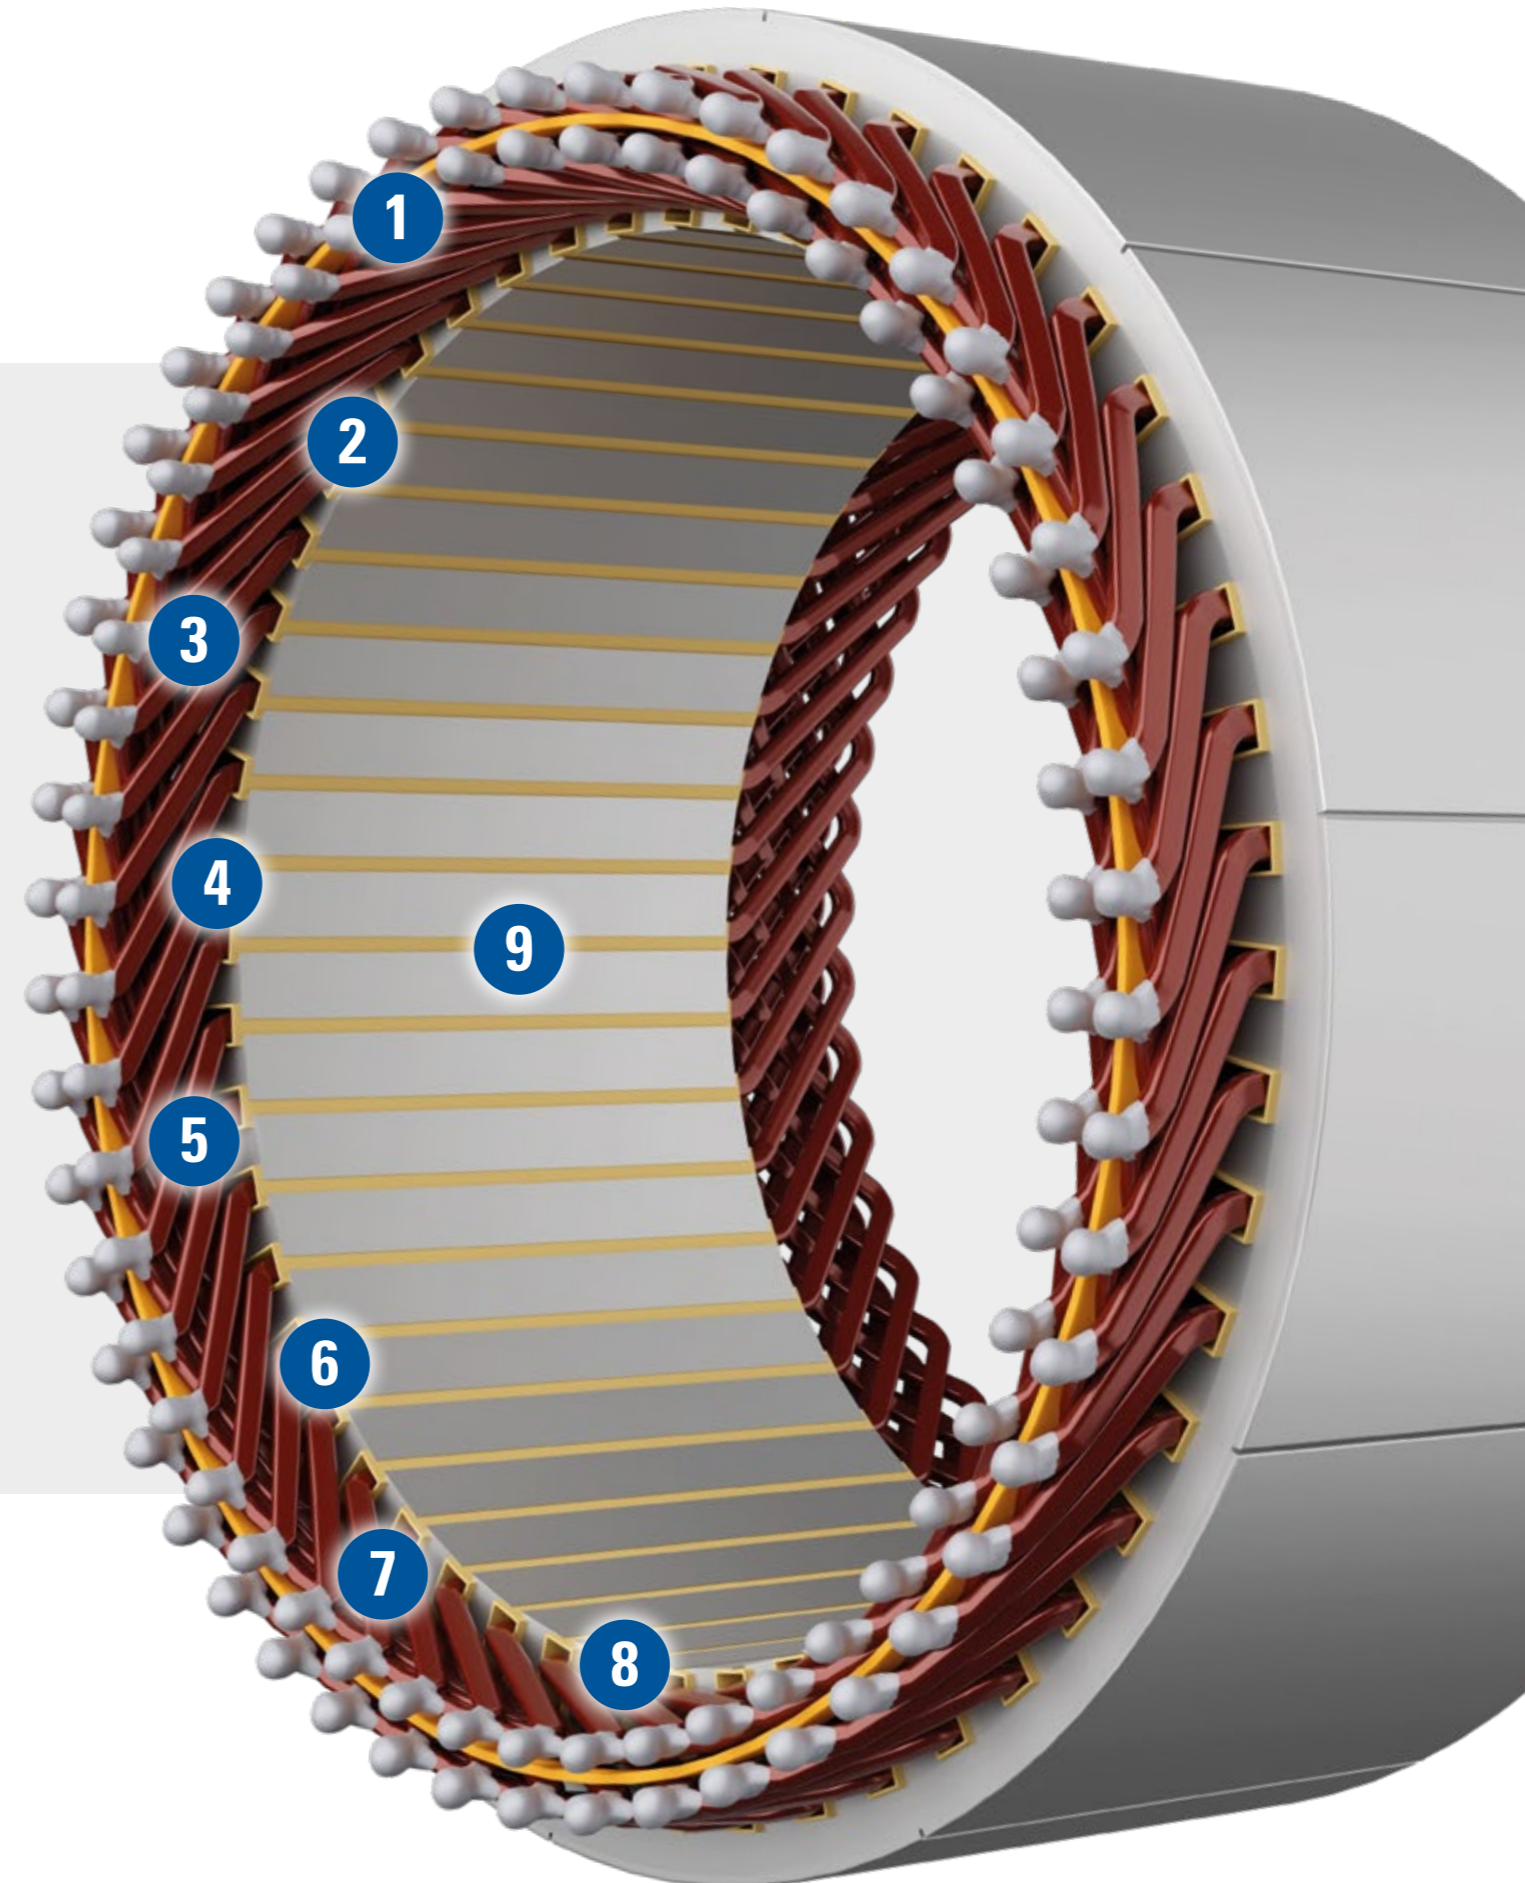

Range of applications

The MTC2 R7 was designed for a wide range of applications and can be precisely tailored to your needs thanks to a large number of configurable options. You get exactly the test device that fits your day-to-day requirements perfectly.



MTC2 R7

- All-purpose
- Convenient:
All connections on the right side



MTC2 R7 heavy-duty case

- Device built into a robust outdoor housing
- Built-in shock absorbers



MTC2 R7 transport case

- Transport case (trolley)
- Incl. compartment for accessories



MTC2 R7

- All-purpose
- Convenient:
All connections on the right side




MTC2 R7 19" rack mount version

- 19" installation device
- All connections on the rear side




MTC2 R7 desktop device

- Robust carrying handles on the sides
- All connections on the rear side

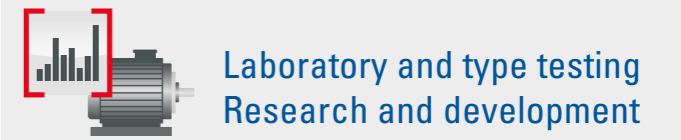

MTC2 R7

- All-purpose
- Convenient:
All connections on the right side

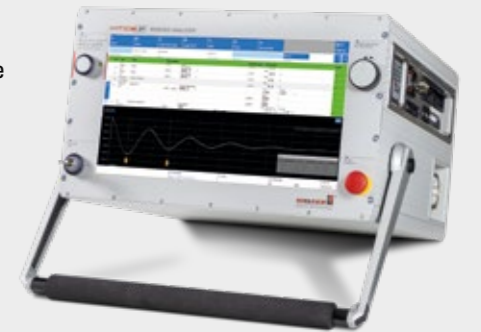

MTC2 R7 desktop device

- Robust carrying handles on the sides
- All connections on the rear side



The MTC2 R7


6 kV, 12 kV and 15 kV

All components are installed in a custom-made, robust industrial housing. The precision measurement technology in the housing is additionally protected against shocks and vibrations through shock absorbers.


The MTC2 R7 adapts to your needs - whether it is in the workshop on the floor or the workbench, in manufacturing, in laboratories or for outdoor applications. We have designed special housing options for different areas of application

A test device can be as good as it is – it must fit into an established infrastructure and extend and refine existing possibilities. For this reason, the discreetly recessed connection panel of the MTC2 R7 base model has been placed on the side to make it easily accessible. Whether you operate the device on a table or standing on the floor, all connections are conveniently within reach at all times.

**SHOCK
PROTECTION
INSIDE**

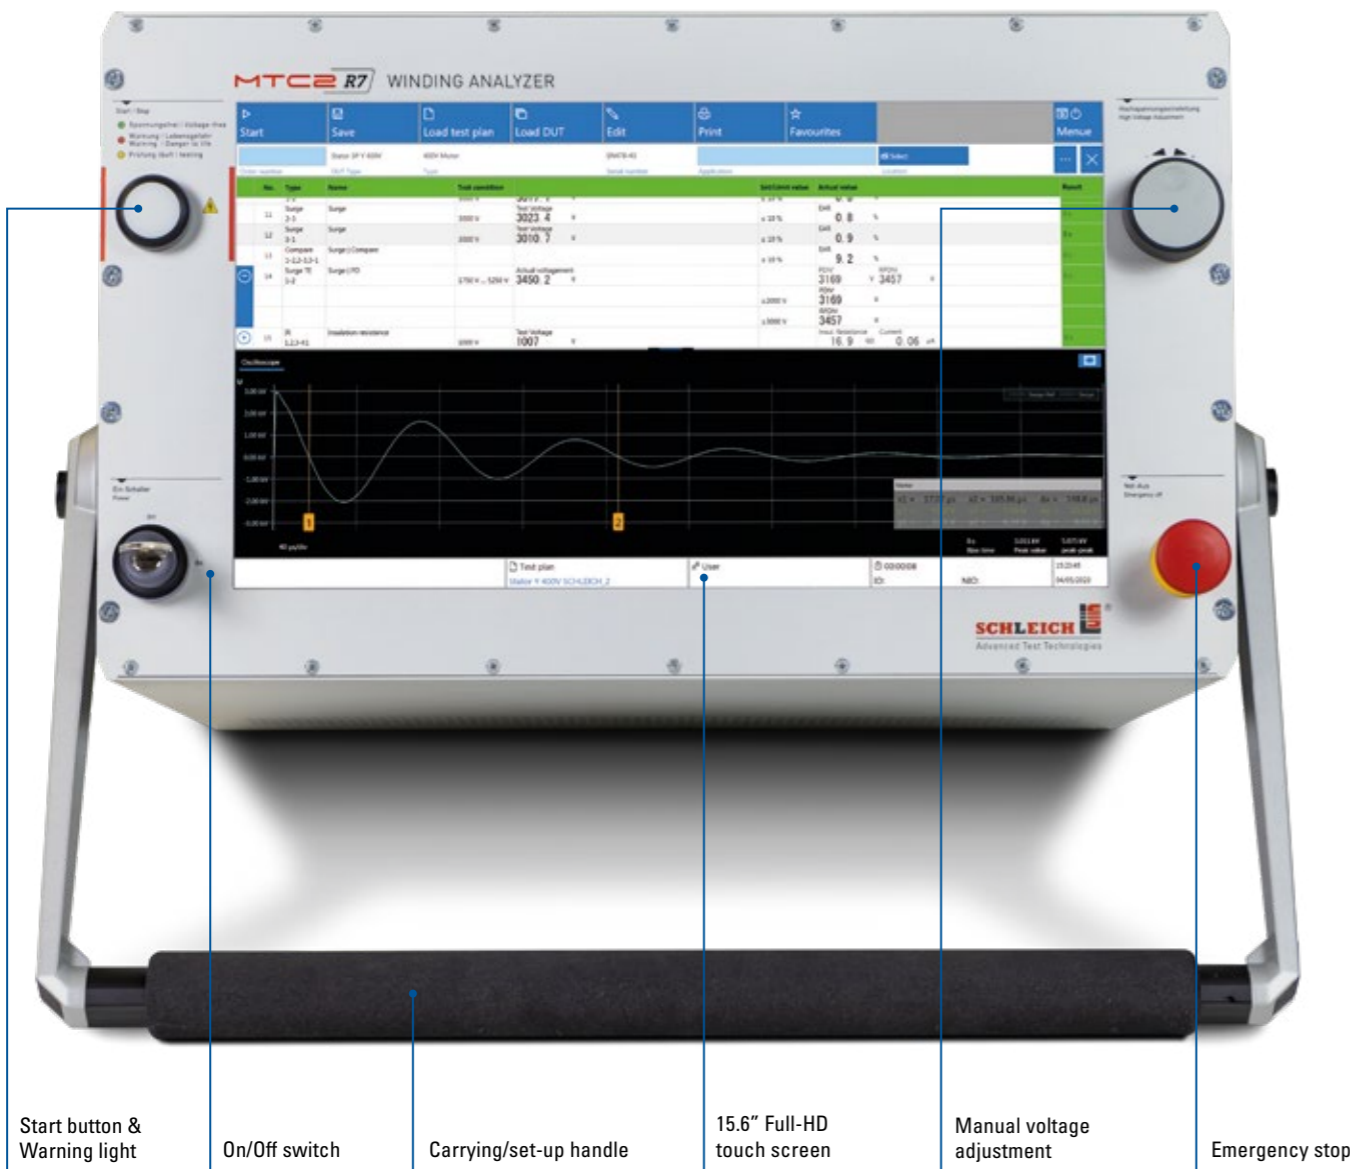

The side connection panel

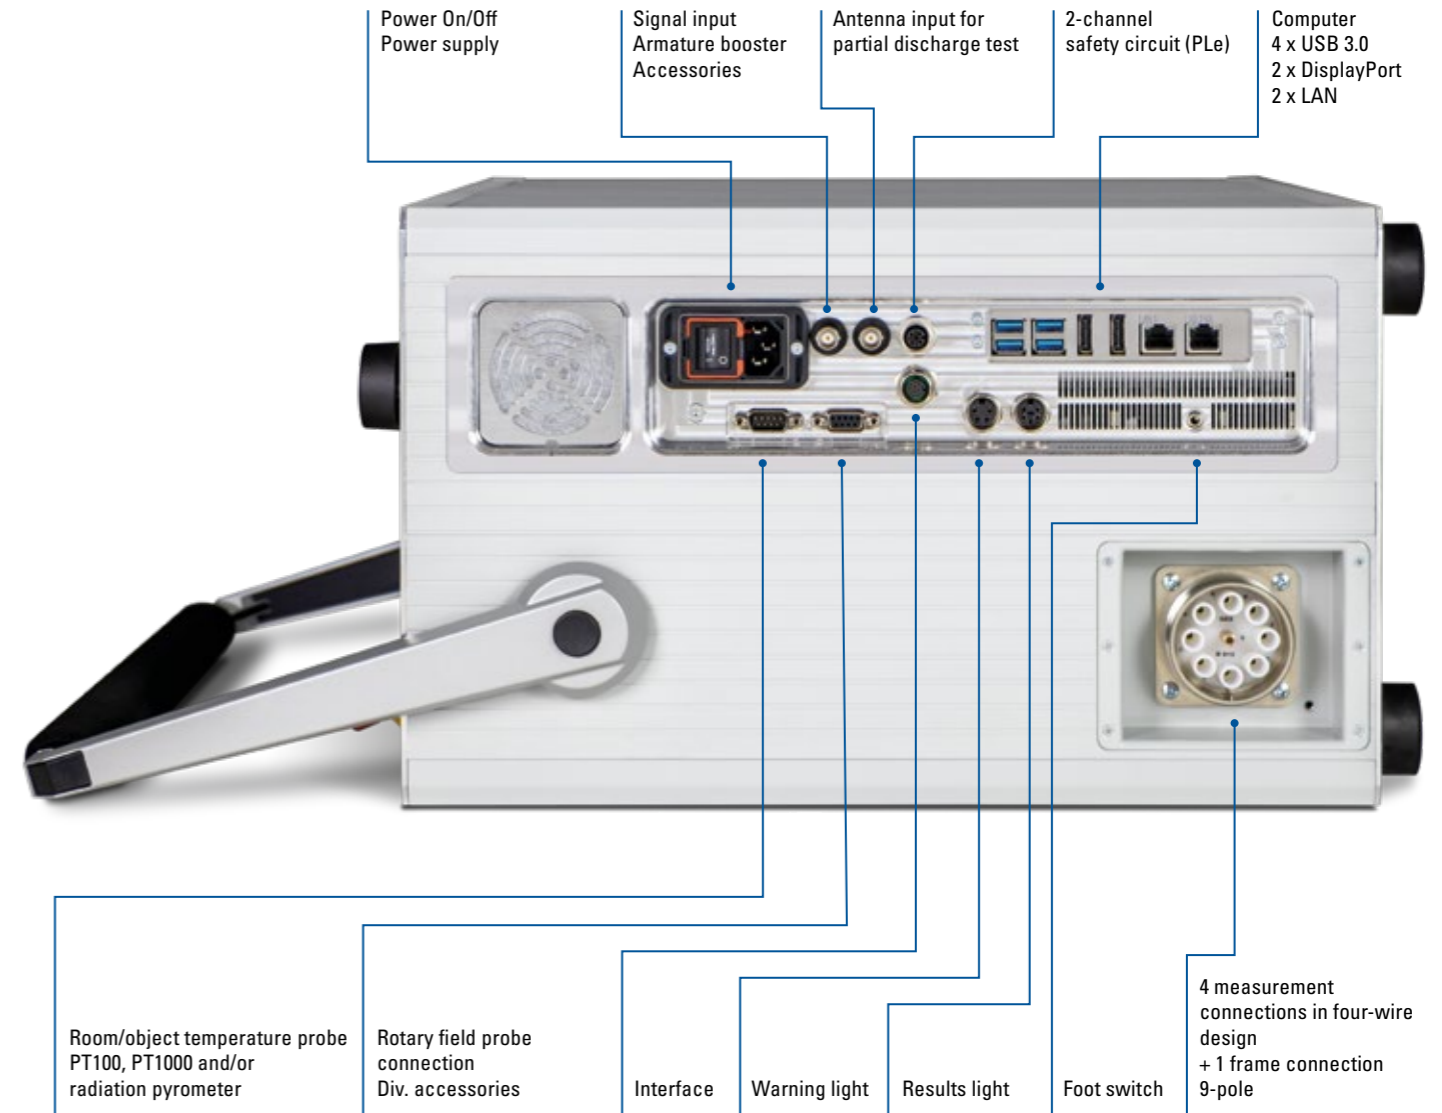


The measurement connection options



MTC2 R7 6 kV

- Pluggable 6 kV test leads
- 4 mm mating connector for alligator clips and Kelvin clamps

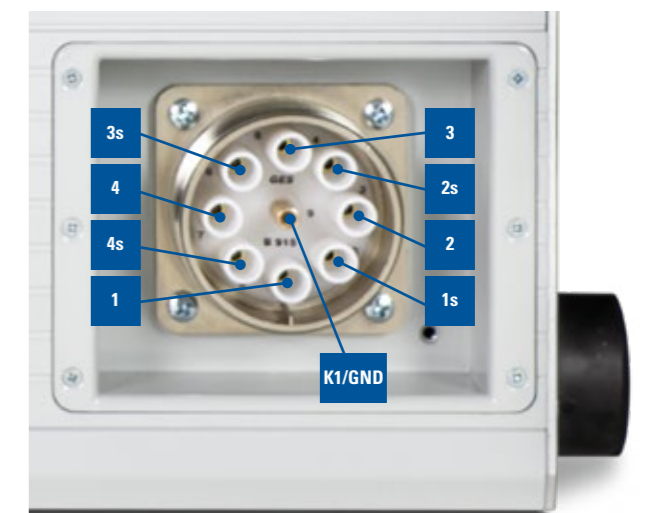

MTC2 R7 12 kV and 15 kV

- Pluggable 12 kV and 15 kV test lead set
- Robust industrial connector

Desktop and 19" rack mount device


6 kV, 12 kV and 15 kV

For the desktop and 19" rack mount devices, all connections are on the rear panel. This makes it easy and convenient to integrate the MTC2 R7 into a 19" rack.

For remote control, these devices are by default equipped with an additional PLC I/O interface. Furthermore, they can be upgraded with additional interfaces and fieldbuses.



The rear connection panel

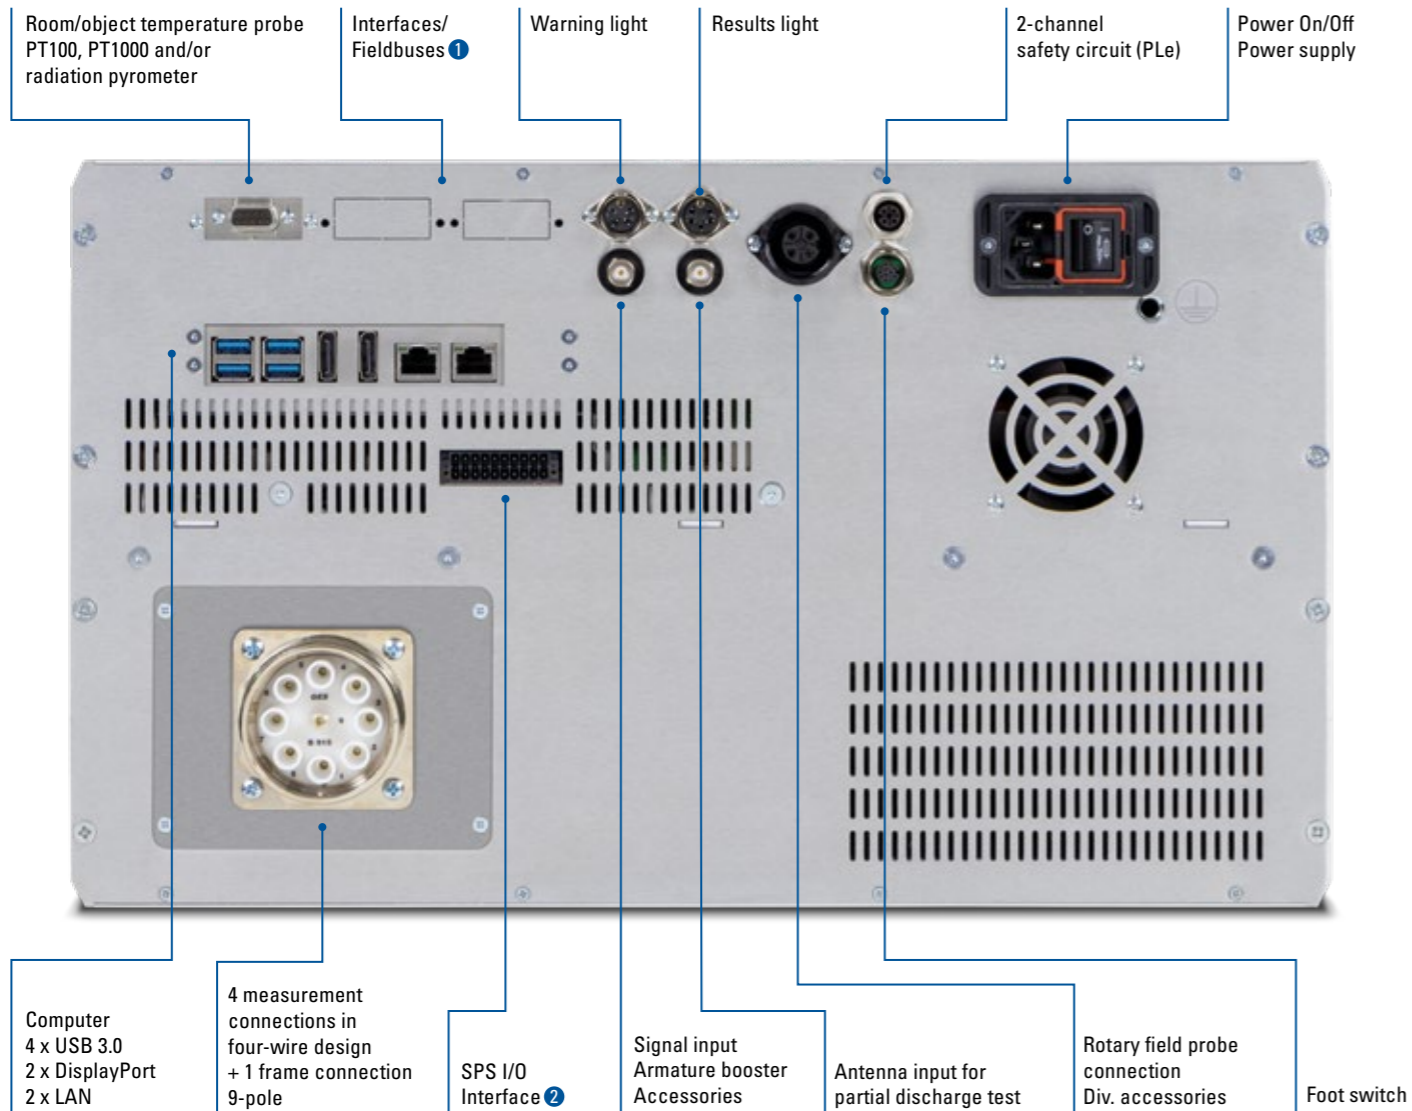

The measurement connection options



Pluggable test leads | 6 kV



Robust industrial connector | 6 kV



Pluggable test lead set | 12 kV & 15 kV

1 Interfaces and fieldbuses



The logos shown are registered trademarks of the respective owners. | * optional

2 SPS I/O interface

Outputs: GO, NOGO, test in progress, ready status and 8 configurable outputs
Inputs: Start and 4 configurable inputs

The MTC2 R7 up to 50 kV

25 kV, 30 kV, 40 kV and 50 kV

The MTC2 R7 with 25 kV, 30 kV, 40 kV and 50 kV surge voltage is the test device for stators, motors and generators that are operated with high voltage.

The test device is installed in a sturdy, robust housing with wheels. Additional shock absorbers in the housing protect the precision measurement technology against impacts and strong vibrations. The large castor wheels ensure excellent maneuverability even on rough surfaces.

Thanks to a large, adjustable monitor, the stand-alone device with keyboard and mouse can be operated comfortably and ergonomically in any situation.

The entire test sequence - including inductance and capacitance measurement - is fully automatic. The built-in test method switch-over in the MTC2 R7 switches the individual tests to the predefined winding connections

The MTC2 R7 is equipped with two winding connections (HV+ and HV-) and one body connection as standard. This means that both moulded coils and complete stator windings can be tested. Optionally, we offer the extension to three winding connections (U, V, W and body).

All test connections are accessible on the back of the device through a high-voltage-resistant industrial plug.

- > Mobile stand-alone device
- > 2 or 3 winding connections (+ frame)
- > Internal test method switch-over
- > Fully automatic test sequence incl. LCR measurement



**SHOCK
PROTECTION
INSIDE**



Adjustable monitor

Ergonomic height surface for keyboard and mouse




Sturdy handle for pushing and maneuvering

Convenient: The rear-mounted winding reel for the measuring leads and the easily accessible storage space for accessories such as Kelvin clamps, foot switches, etc.

Large castor wheels, 360° rotatable


The test method switch-over

To save time, all connections of the device under test can be plugged using a contacting adapter. The test device then performs the scheduled tests fully automatically without the need for manual intervention. This is made possible by the SCHLEICH-typical automatic test method switch-over.

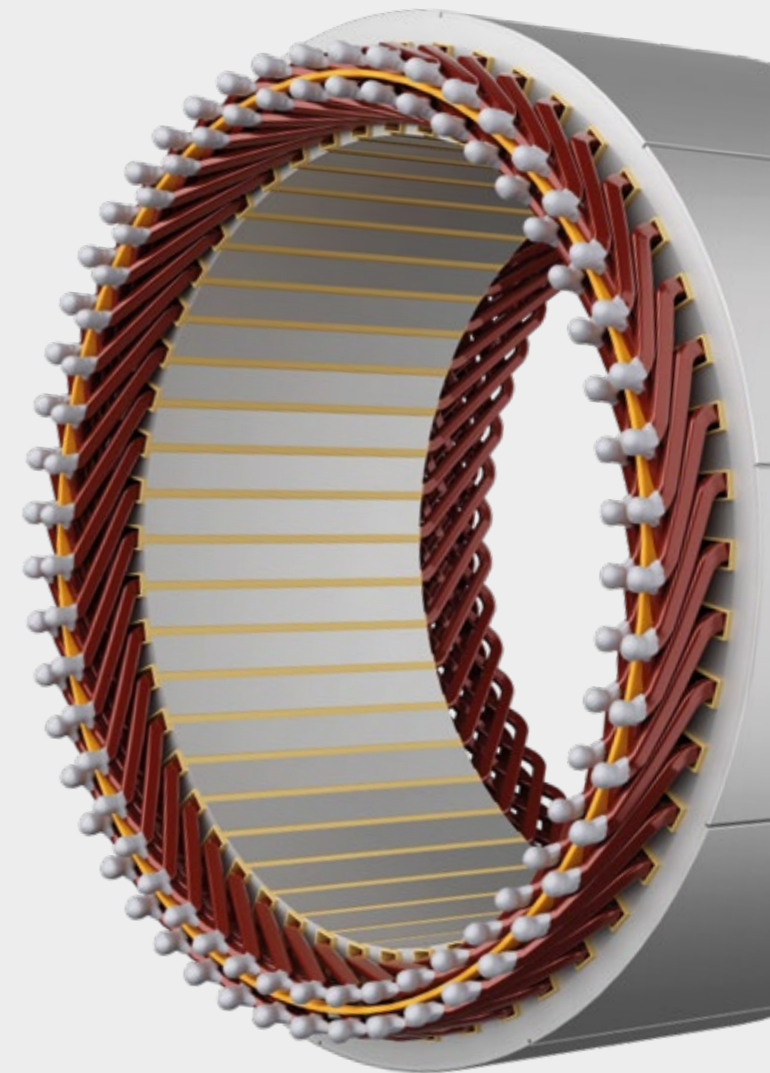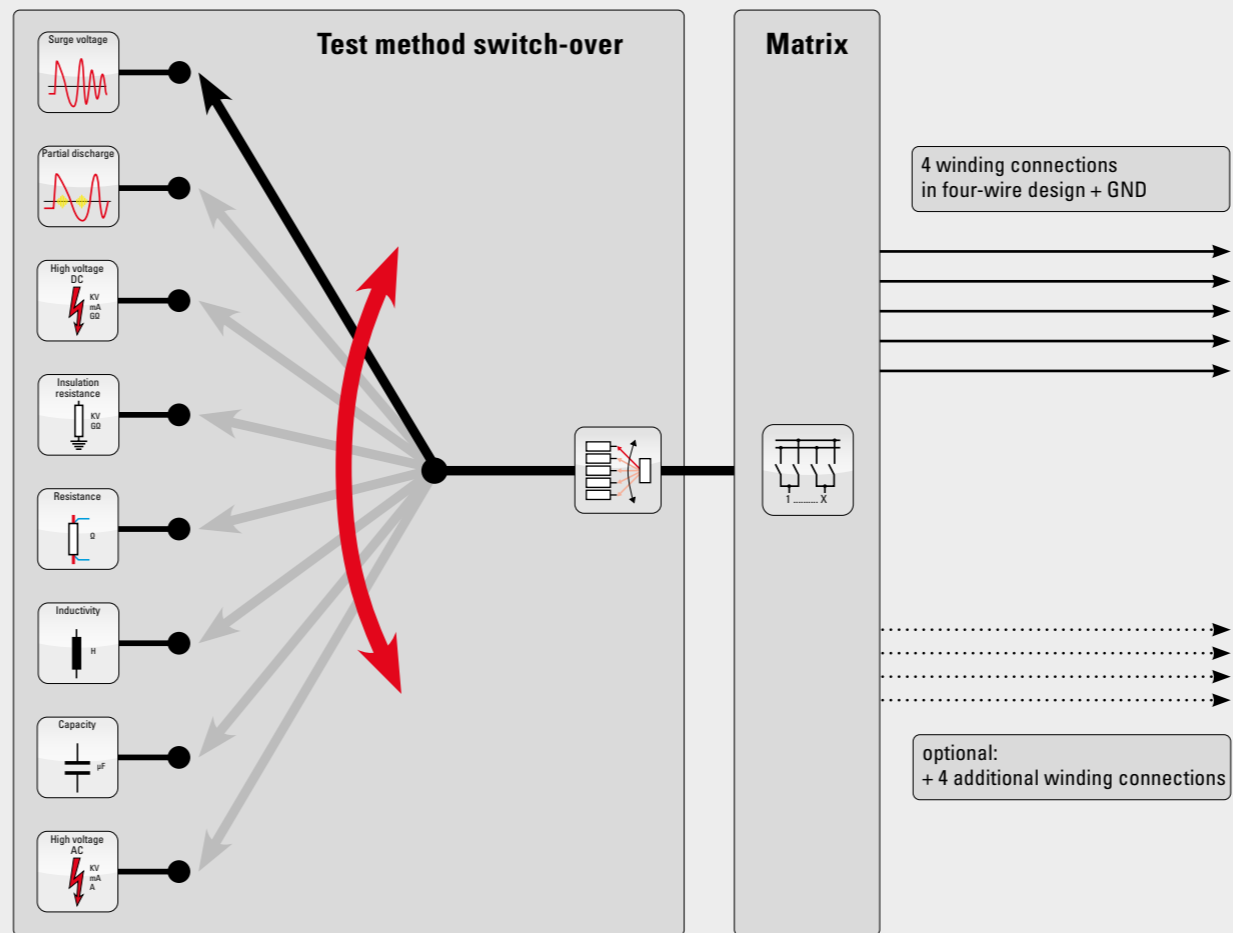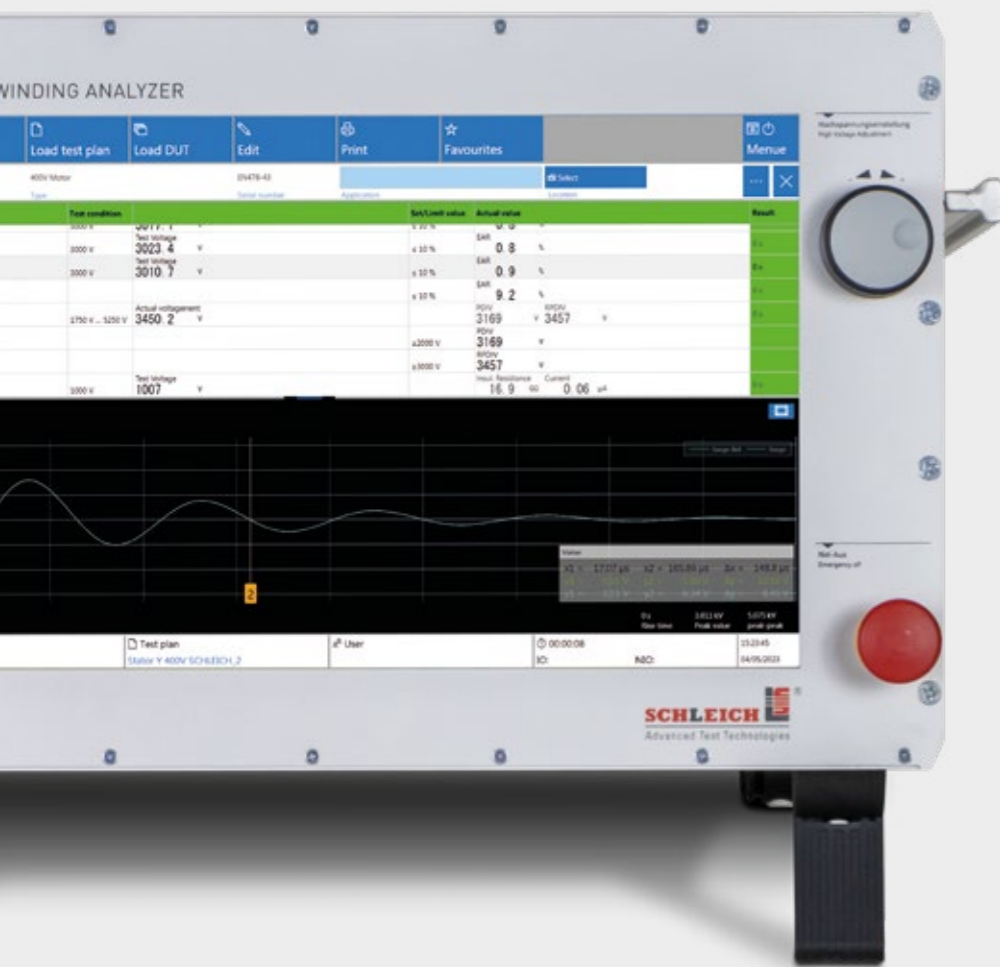

Our test method switch-over ensures fast and automatic switching between the different test methods. Because the voltage differences between the test methods can be immense, reliability is the top priority for switch-overs. A resistance test with 3 V is switched to the device under test just as reliably as a high voltage test with 15 kV. Without compromise!

For test devices with multiple connections, it is more cost-effective to simultaneously connect all terminals of the device under test to the MTC2 R7. The test device then automatically performs all tests between all connections. This procedure reduces the required cycle rate and thus the cost of a test. We achieve the switch-over between the different connections by utilizing flexible switch-over matrices.

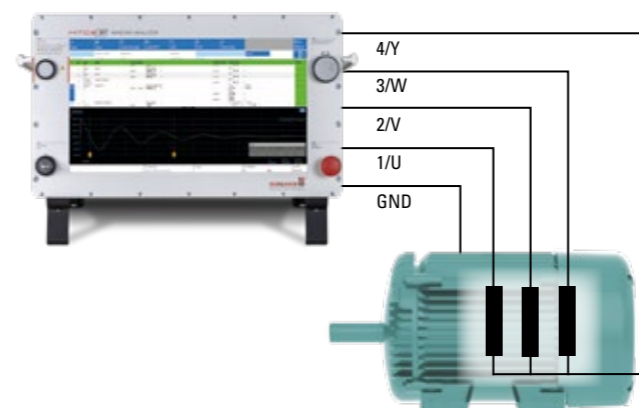

We provide the right relay matrix for almost any task. Matrixes differ in the number of connections and the level of the test voltage to be switched. A matrix must be able to switch 15 kV just as safely and reliably as signals in the millivolt range. This is precisely what our engineers have developed the matrixes for. Matrixes are designed for four-wire applications. The MTC2 R7 has 4 connection terminals. Optionally, an extension to 8 terminals is available.

For switching and matrixes, we only use high-quality components from our own production or from well-known manufacturers that have been tried and tested thousands of times.

The surge voltage test


For precision fanatics: Even the smallest faults do not go unnoticed by the MTC2 R7. With the elaborate variety of outstanding evaluation methods, that can be combined as required, you can realize the 360° analysis of your device under test. In combination with state-of-the-art hardware for signal acquisition, SCHLEICH offers an exceptionally detailed and very accurate fault analysis. As a result, misinterpretations are reduced to a minimum.

The parameterization to the signals to be evaluated is executed virtually fully automatically. The test device independently selects the most favorable settings for the signal in order to achieve maximum sensitivity. Furthermore, the MTC2 R7 is equipped with

automatic voltage correction. The test voltage is always adjusted optimally, depending on the device under test. This makes fault diagnosis much easier, allowing you to draw qualified and routine conclusions about the condition of your motors very quickly.


The assessment is either based on a reference signal stored previously, on an automatic comparison of all three phases against each other, or is carried out using the new, patented peak-to-peak method.

- > 125 joules surge energy
- > 2000 A surge current
- > Rise time up to 60 ns
- > Patented evaluation methods
- > Pulse repetition rate up to 50 Hz

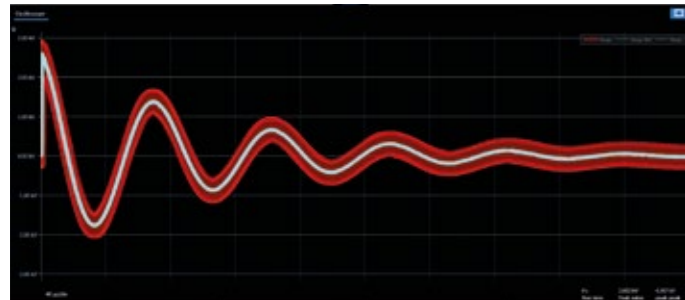


Tolerance band

The tolerance band is one of the more straightforward evaluation methods in which an envelope curve is wrapped around the signal. The surge wave must be within a defined tolerance band.

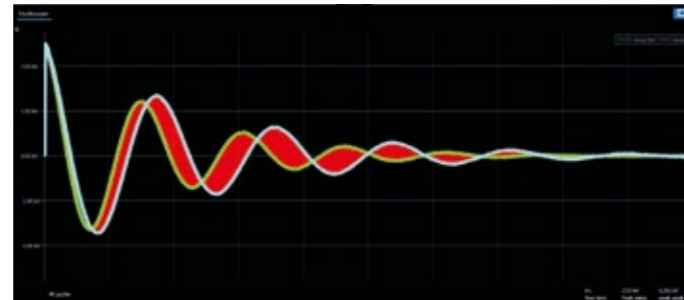


Error area EAR

The error area is the difference in area between two signals (surge waves). The surface difference between the reference surge wave and the currently measured surge wave is determined automatically and the deviation is displayed in %.

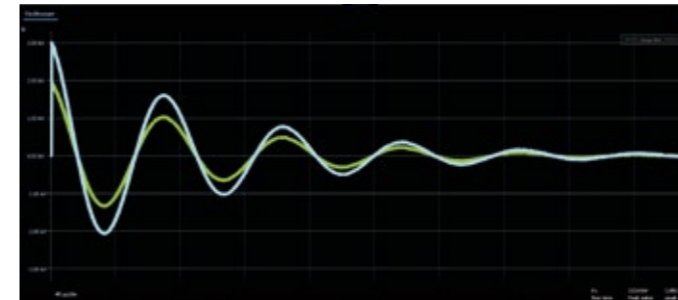


Correlation | Patented evaluation method

The correlation between the reference surge wave and the currently measured surge wave is automatically determined and the difference is displayed in %.

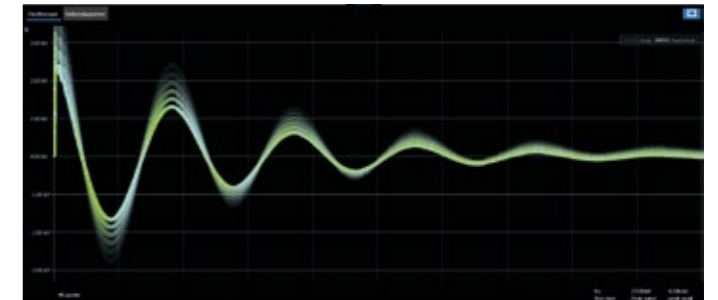


Peak-to-Peak | Patented evaluation method

The peak-to-peak method increases the test voltage step by step. If there is an increased deviation from one step to the next, the test is stopped. The deviation from step to step is displayed in %.

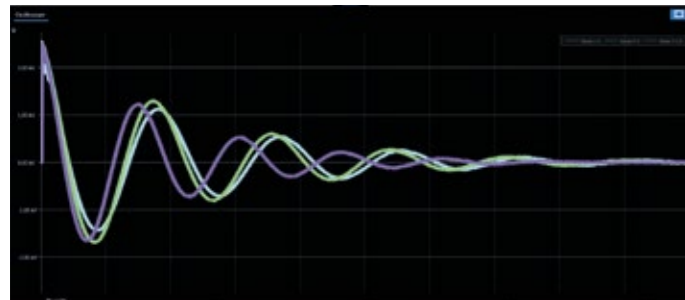


Phase comparison

Phase comparison automatically compares all three phases of a motor and presents them in a diagram. This makes it possible to determine and evaluate symmetry directly. This method is usually applied in motor repair.

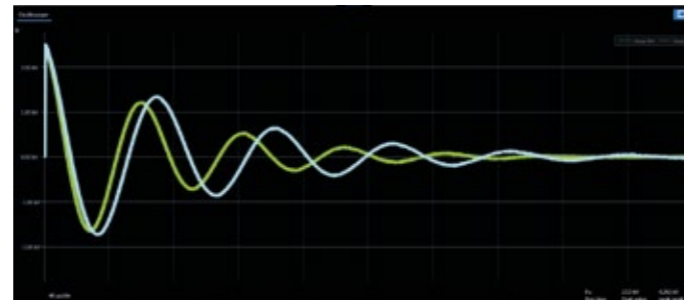

Reference comparison

Comparison to a reference is possible when a "good" device under test has been previously recorded. This method is typically used in production.

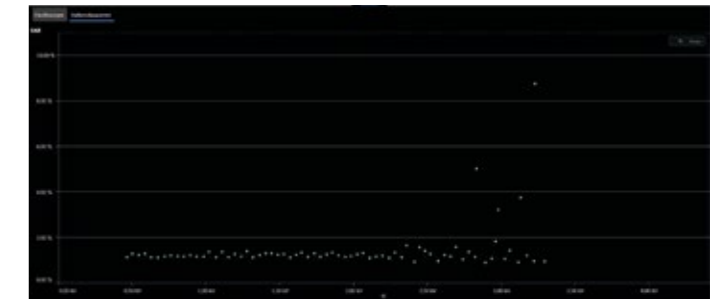

Surge voltage test

| Model MTC2 R7 | 6 kV | 12 kV | 15 kV |
|------------------------|------------------|-------------------|-------------------|
| Test voltage | 200 V - 6 kV | 500 V - 12 kV | 500 V - 15 kV |
| Surge capacity 100 nF* | Yes 1,8 J | Yes 7,2 J | Yes 11,25 J |
| Surge capacity 200 nF | Optional 3,6 J | Optional 14,4 J | Optional 22,5 J |
| Automatic switch-over | Yes | Yes | Yes |

*With optional surge current boost


The partial discharge test in accordance with IEC 61934 and DIN EN 60034-18-41

Optional extension

The partial discharge test is used to check the winding quality of winding goods. The test can be performed in conjunction with both the high voltage test (sine wave) and the surge voltage test. Essentially, the aim is to detect quality defects in windings that cannot be detected with the standard high voltage test or even the surge voltage test alone.

Coupling technology in combination with high-frequency filter technology makes the system highly resistant to interference. It is therefore ideally suited for field operation or in manufacturing applications.

Automatic run of the standard-compliant PD test

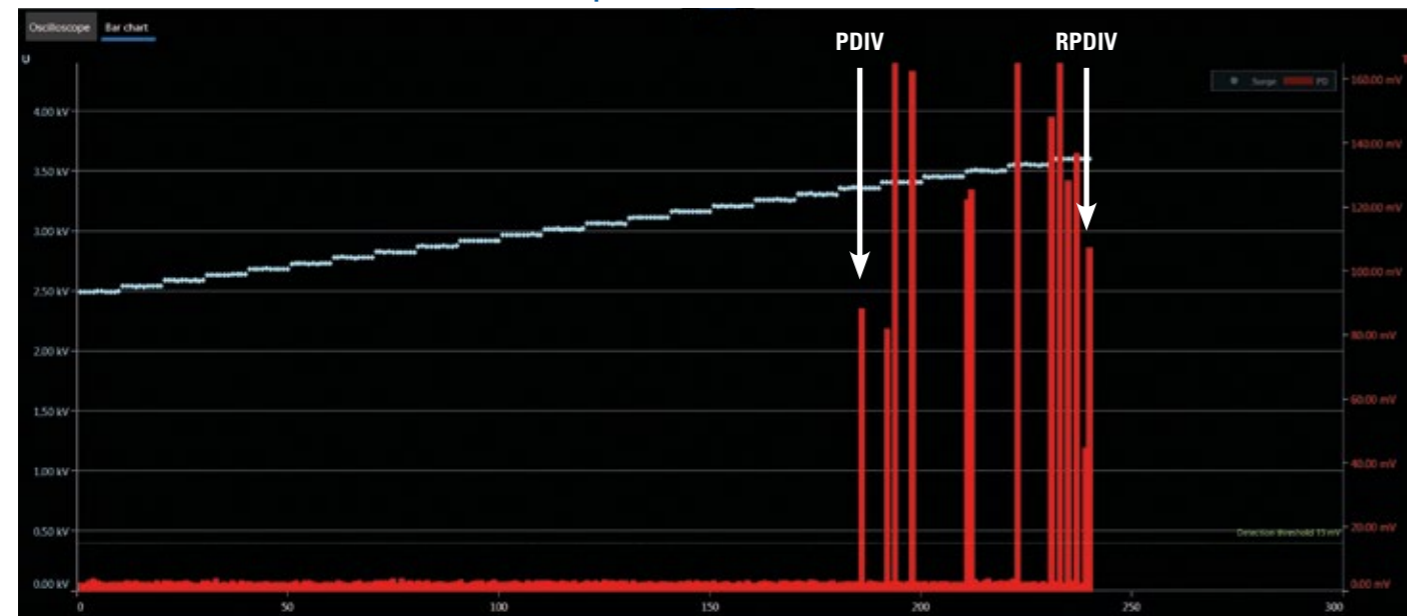

The test is carried out either manually or fully automatically. In manual mode, the user increases the voltage while simultaneously monitoring the partial discharge signal.

Automatic operation allows all three phases to be analyzed fully automatically via a test sequence. The following values are evaluated for each phase:

- PDIV (inception voltage)
- PDEV (extinction voltage)
- RPDIV (repetitive inception voltage)
- RPDEV (repetitive extinction voltage)


It is not necessary to run the entire ramp. If a quick distinction needs to be made between GO and NOGO in production, the patented **50 Hz high-speed test** can be carried out as an option. Alternatively, a fixed test voltage can be used.



Surge voltage pulse with 150 ns rise time and PD effects

- > Determination of PDIV, RPDIV, RPDEV and PDEV
- > Partial discharge test up to 15 kV
- > Uniquely fast test method

The partial discharge test – now up to 75 % faster!

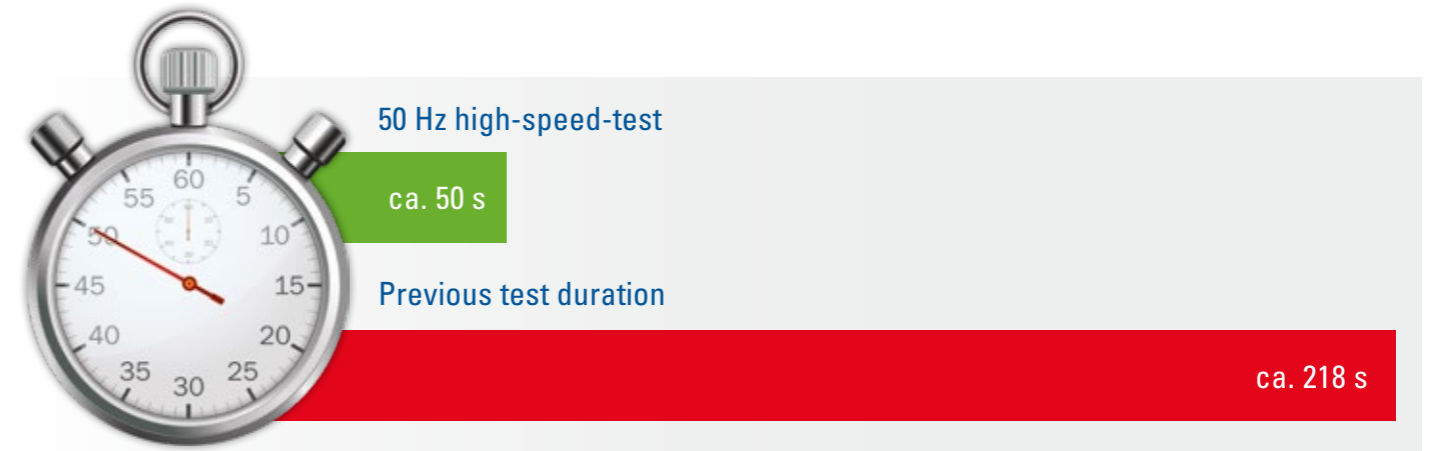


The illustration is exemplary. Test time reduction depends on the test settings!

The combination of these two measurement methods is unique worldwide

The partial discharge measurement (filtering and analysis) is fully integrated in the MTC2 R7. Only the decoupling (measurement) of the actual partial discharge signal takes place outside the device. This is essential in order to optimally adapt to the respective measurement conditions.


Partial discharge test on an open stator winding

The partial discharge measurement on an open stator winding is realized by means of a highly sensitive measuring antenna, which is placed in the device under test or in its direct vicinity.

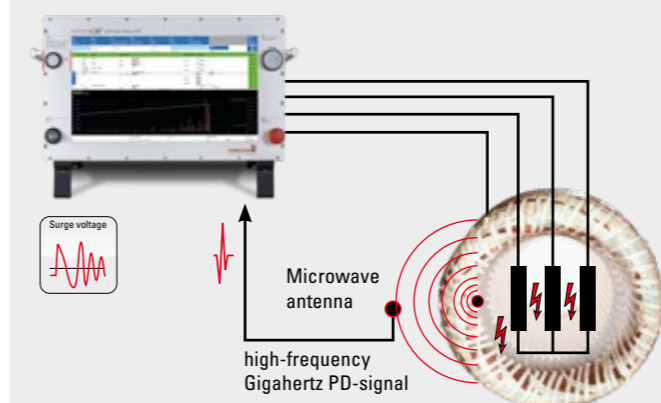

Partial discharge test on an assembled motor

Measurements on a fully assembled motor cannot be made with an antenna, since the high-frequency signals are being shielded by the sealed motor housing. In such cases, measurements are made using a special coupler which is looped into the measuring leads.

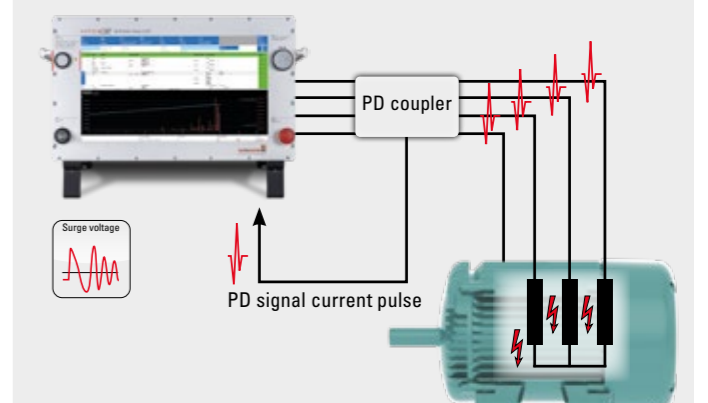

Both the antenna and the special coupler can be connected to the MTC2 R7 as required.

The insulation resistance test


The insulation resistance test integrated in the basic device was specifically designed for testing electric drives. Conveniently, the test voltage is automatically switched to the test lead, which is also in use for surge voltage and resistance testing. Switching over the test leads between measurements is not necessary. The switch-over is fully automatic up to a test voltage of 50 kV.

This includes, among others, the following functions:

- Separate current limit values during ramp phase and test phase
- Contact check via minimum current monitoring
- Temperature compensation of the insulation resistance according to IEEE Std 43


The software offers preconfigured sequences for PI, DAR, high voltage DC, MegaOhm and step voltage testing. In combination with the new fully automatic ramp time determination, handling has been simplified considerably. To configure the test device in the ideal way for special applications, all parameters can also be adjusted individually.

- > High voltage DC up to 50 kV
- > PI | DAR | step voltage
- > Up to 500 GΩ (optional up to 1 TΩ)

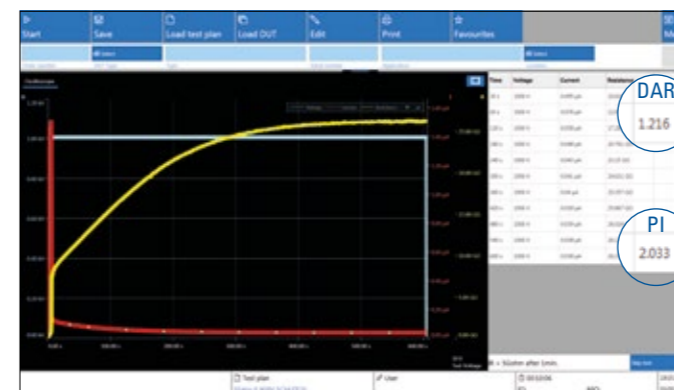

PI | DAR test

- Logging of the measurement every 60 s
- The first two readings are recorded at an interval of 30 s
- Display of the measurement both in graphical and table form

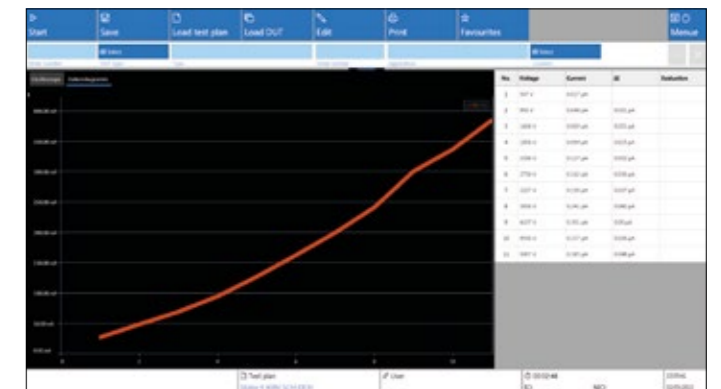

Insulation resistance test with ramp

As a rule, the ramp time is defined and specified manually for each individual device under test. However, it must be ensured that maximum charging currents are not exceeded.

The MTC2 R7 determines the shortest ramp time using the automatic charging current determination in the initial phase of the ramp function. This feature is included in every device.

Nevertheless, it is still possible to set custom parameters for the ramp function. To do this, the ramp duration is set and the maximum permissible charging current is set as the evaluation criterion.

- Automatic charging current detection for minimum ramp time
- Adjustable ramp and test time
- Graphical representation of current, voltage and insulation resistance in a diagram
- Discharge after the test is displayed and logged


Step voltage test

- In combination with PI/DAR test
- Standard-compliant evaluation of the current values at the end of each individual step
- Display of the measurement both in graphical and table form

Insulation resistance test

| | |
|-----------------------|----------------------|
| Modell MTC2 R7 | 6 kV/12 kV/15 kV |
| Test voltage | 200 V - max. voltage |
| Measurement range | 100 kΩ - 500 GΩ |
| Automatic switch-over | Yes |

The resistance test

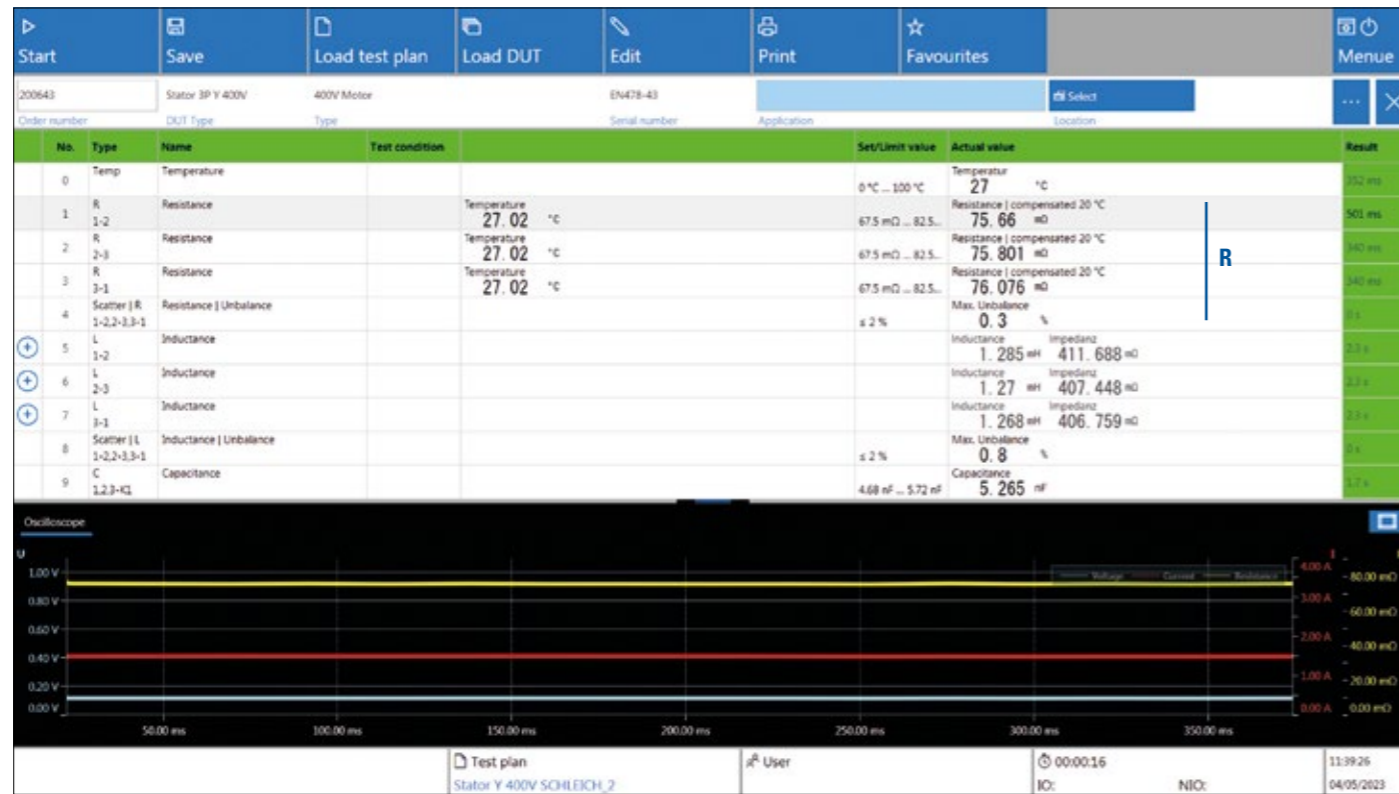

The MTC2 R7 comes equipped with the resistance test from the base model onwards. This makes it possible to test phase resistances, temperature sensors (NTCs, PTCs and KTYs) and single coils.

It is not necessary to switch the test leads to perform the resistance test. The test is performed immediately and fully automatically via the test leads already connected to the device under test. This is possible thanks to the unique built-in test method switch-over of the MTC2 R7.

Room temperature compensation

- Temperature sensor connection directly on the device
- Connectable sensors:
 - Room temperature sensor
 - Object temperature sensor
 - Pyrometer
 - Hygrometer and barometer
- Three independent input signals, each with 0 - 10 V or 4 - 20 mA
- Measuring range 0 - 100 °C (32 - 212 °F)
- Adjustable reference temperature
- Fully automatic compensation of resistance values for copper, aluminium and temperature sensors

Resistance test

| | |
|-----------------------|------------------|
| Model MTC2 R7 | 6 kV/12 kV/15 kV |
| Measurement range | 1 mΩ - 999 kΩ |
| Resolution | 1 μΩ |
| Automatic switch-over | Yes |

- > High-precision measurements in four-wire technology
- > From 1 mΩ to 1 MΩ
- > Fully automatic temperature compensation
- > Temperature sensor, hygro- and barometer can be connected directly

The inductance and capacitance test

Optional extension to the resistance test

The use of a capacitance measuring bridge is a thing of the past. Use the optional measuring bridge integrated in the MTC2 R7 to measure inductances, impedances and capacitances with high precision.

The following evaluation options are available:

- Comparison of the actual value to a specified target value
- Determination of the symmetry (spread) of all three phases

- > High-precision measurements in four-wire technology
- > Fully automatic test method switch-over
- > From 0,1 μH to 500 mH
- > From 1 nF to 100 μF



Inductance and capacitance test

| | |
|-------------------------|--------------------------------|
| Model MTC2 R7 | 6 kV/12 kV/15 kV Version „RLC“ |
| Measurement range L | 1 μH - 500 mH |
| Resolution L | 0,1 μH |
| Measurement frequency L | 50/60 Hz* |
| Measurement range C | 1 nF - 100 μF |
| Resolution C | 0,1 nF |
| Measurement frequency C | 4 kHz* |
| Automatic switch-over | Yes |

* Further measurement frequencies optional

The high voltage test AC


Optional extension

Integration of the high voltage test AC into the MTC2 R7 with automatic and immediate switch-over to the measurement connections.

Reconnecting the test leads is not necessary. The test is conducted fully automatically via the test leads already connected to the device under test.

This extension is only available in the 19" or desktop version due to the embedding of the high voltage test. The size of the device increases to 10 HU as a result.

| High voltage test AC | |
|---------------------------|-------------|
| Test voltage | up to 6 kV |
| Test current | max. 100 mA |
| Quick shutdown | adjustable |
| Part number MTC2 R7 6 kV | 4023207 |
| Part number MTC2 R7 12 kV | 4023207 |
| Part number MTC2 R7 15 kV | 4023569 |

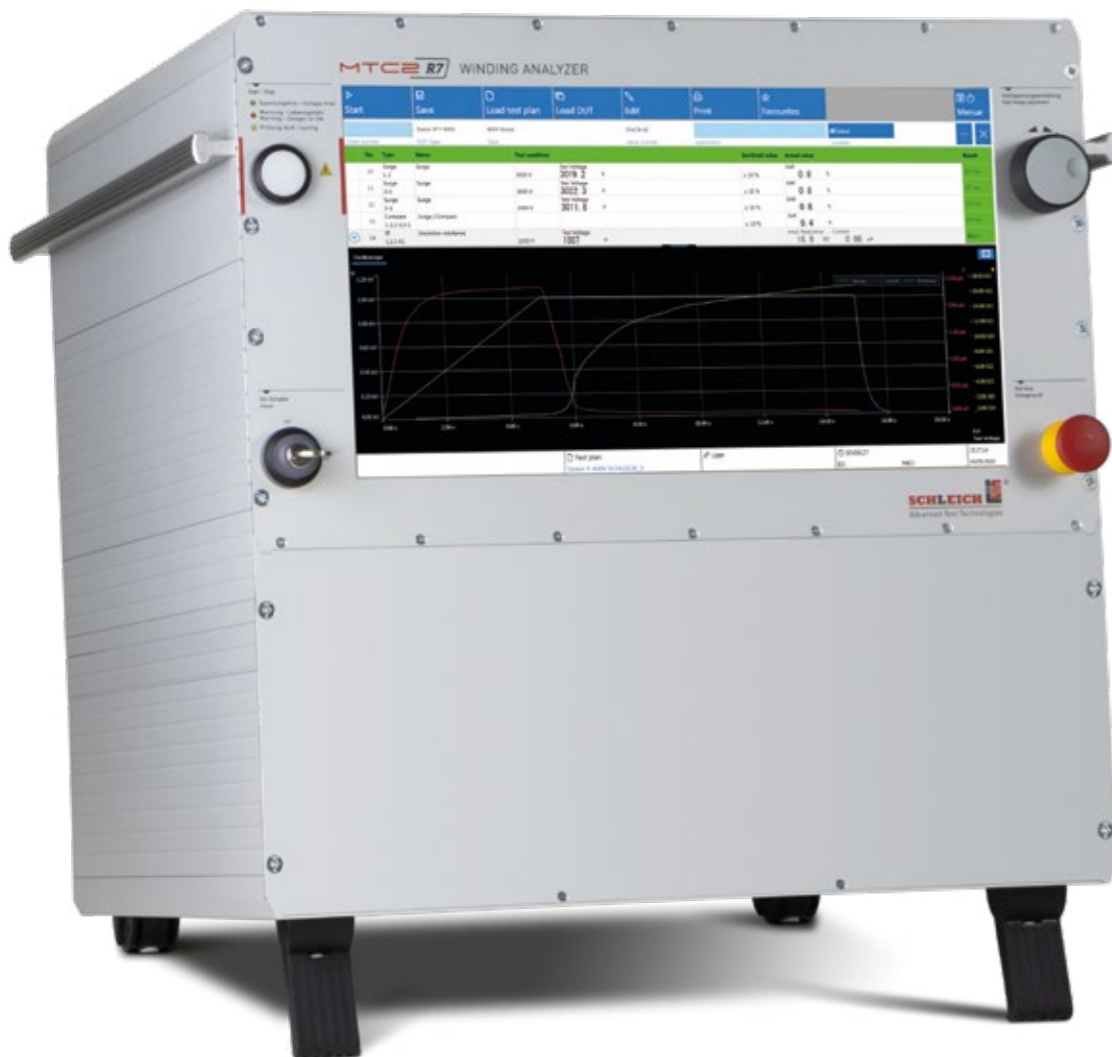

- > Standard-compliant high voltage test
- > Fully electronically controlled
- > 6 kV @ 100 mA, 200 mA I_k

Rotary field test


Optional extension

The rotary field test serves to measure and evaluate the rotary field of a stator. The test is performed contactlessly by means of a rotary-field probe, which is inserted into the stator or attached to a DUT holder.

The rotary field is created by a connected current-limited low-voltage rotary field, which simulates the 3-phase supply of the motor. With this test, coil-connection errors in production can be detected before the motor is assembled.



Rotary field probe positioned in a stator

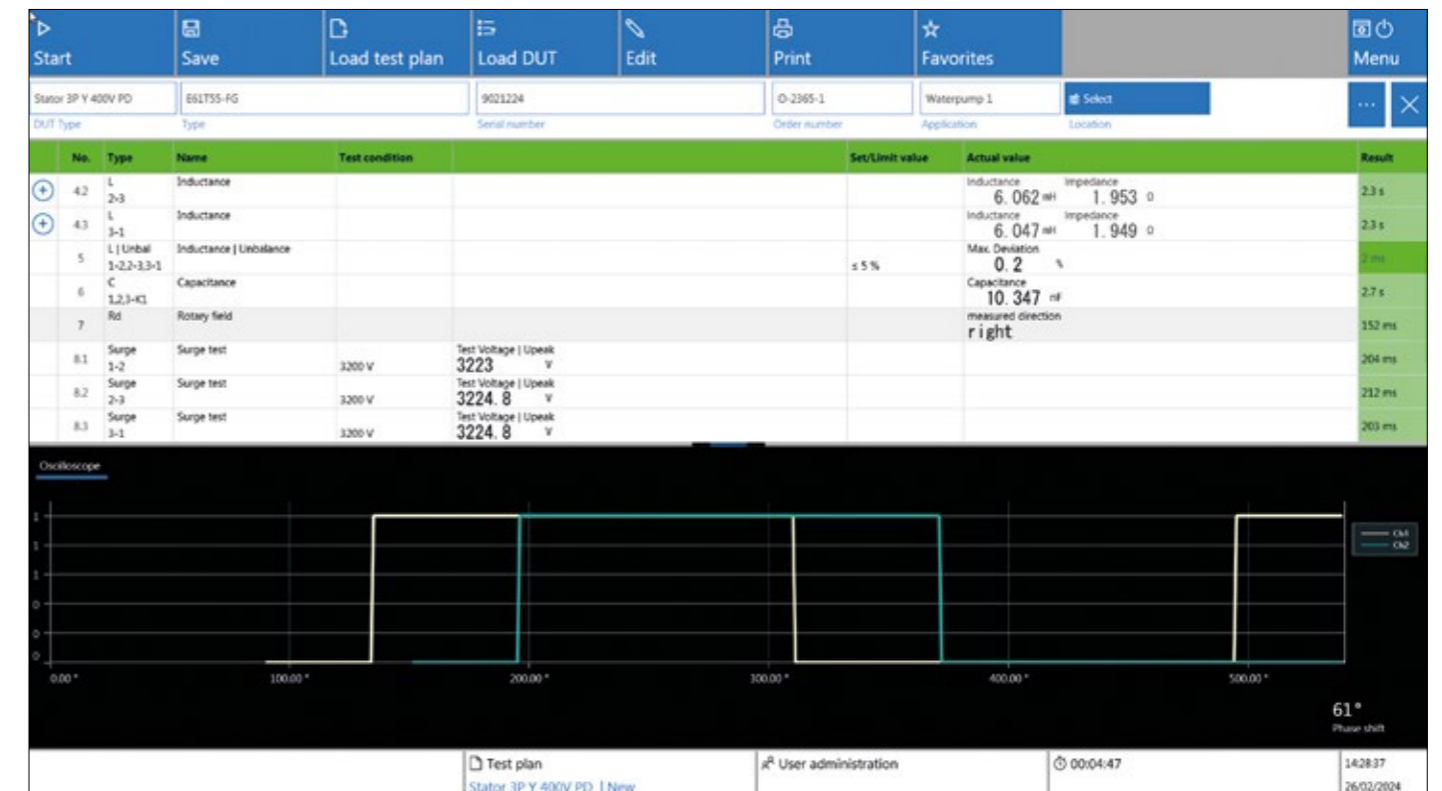

- > Contactless rotary field test
- > Wear- and maintenance-free
- > Short-circuit-proof
- > Also suitable for single-phase motors

VoltageAnalyzer

Optional extension



UNIQUE TECHNOLOGY
MADE BY SCHLEICH

- > Precise voltage measurement at winding connections
- > Fully automatic switch-over
- > Potential-free voltage measurement
- > Standard-compliant measurement in accordance with DIN EN 60034-18-41:2021

The VoltageAnalyzer is designed to measure surge voltage signals directly at the motor winding. The frequency response covers the range from DC to very high pulse frequencies in the MHz range. This makes the VoltageAnalyzer the perfect choice for high-precision surge voltage and partial discharge measurements.



It measures the voltages and voltage peaks directly where they occur. For instance, this could be inside the motor at the motor terminal board or directly at the winding connections.

Voltage measurement during surge voltage and partial discharge


In some cases, the voltage measured internally in the surge tester does not exactly match the voltage at the device under test. The reason for this is that unavoidable line inductances and capacitances between the test leads can change the voltage curve of the surge signal on the path to the device under test. This occurs more intensively the steeper the surge pulse rises.

In order to precisely measure the actual partial discharge inception voltage applied to the motor terminal board during a partial discharge test, for example, measurement via the VoltageAnalyzer directly at the terminal board is required.


In order to inspect a three-phase motor or stator quickly and without the need to reconnect any terminals, the VoltageAnalyzer is equipped with three measurement connections. These are connected directly to the terminals U, V and W of the device under test via the shortest possible measurement leads. The measuring point switch-over between the three measurement connections is fully automatic within the VoltageAnalyzer and synchronous with the surge voltage test.

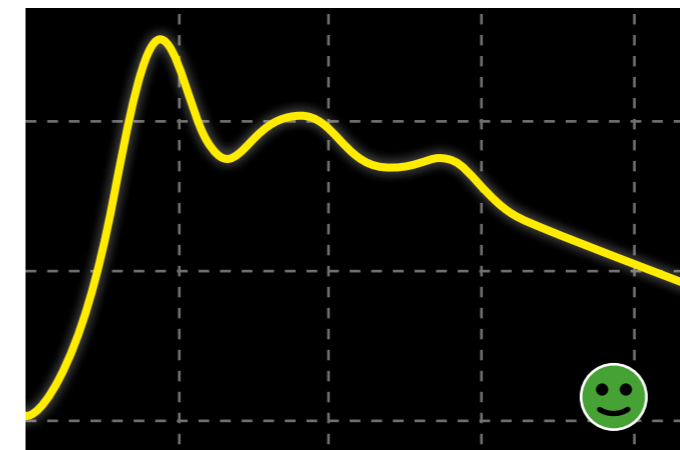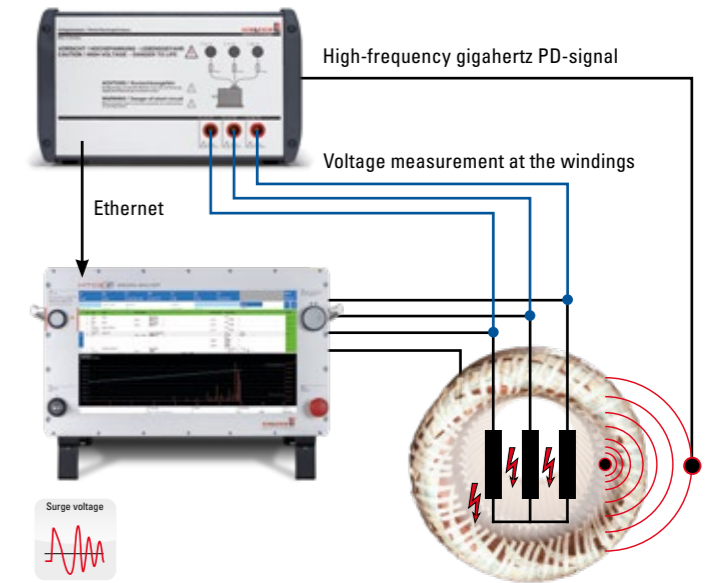

- Voltage signals measured with the VoltageAnalyzer
- measured directly at the motor terminals
 - precise overshoot measurement
 - accurate peak and peak-to-peak voltage measurement

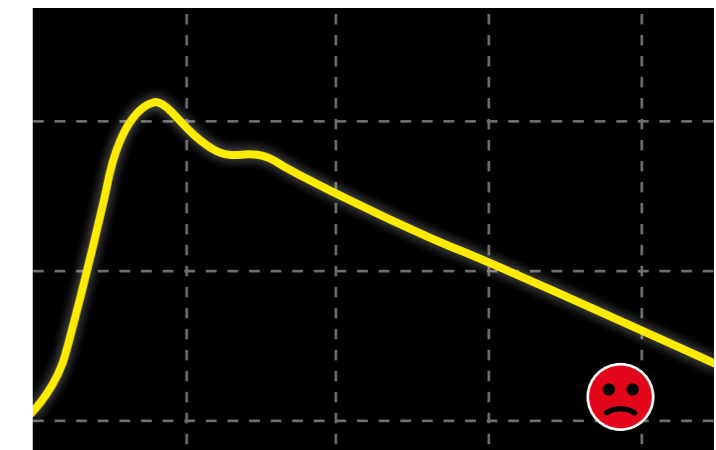

- Voltage signals measured without VoltageAnalyzer.
- signal waveform is not measured at the motor terminals
 - high damping of the overshoot signal

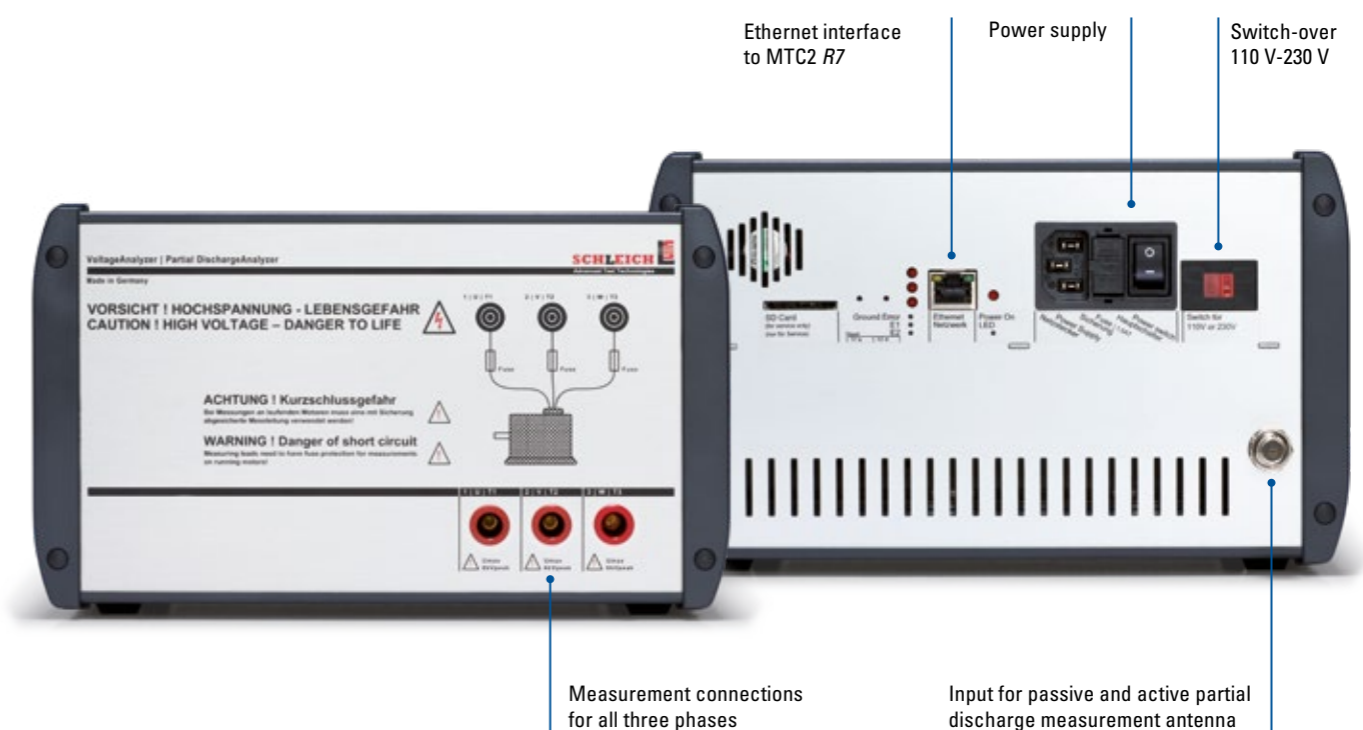

Armature booster

Optional extension



For armature testing, an additional armature booster is available for the MTC2 R7 test devices. It is needed for testing larger, low-inductance DC armatures. The armature booster increases the surge current by a factor of 10 to find short circuits and insulation faults between the bars.

The evaluation is performed fully automatically using the patented method made by SCHLEICH

The armature booster is connected to the measurement leads of the MTC2 R7. Two solid test probes with built-in start button are available for the operator at the output of the booster. In addition, a built-in warning light indicates whether the probes are voltage-free. An acoustic signal indicates whether the test is GO or NOGO.

Booster Pack

| | |
|----------------------|----------------------|
| Model MTC2 R7 | 6 kV 12 kV 15 kV |
| Output current | >2000 A possible |
| Output voltage | ≤1500 V |
| Four-wire technology | no |
| Pluggable | yes |
| Part number | 4023227 |

Collector test probes

Probes for armature test booster



| | |
|-------------|---------|
| Part number | 4023403 |
|-------------|---------|

Hand adapter armature contacting




| | |
|--------------------|------------|
| Adjustable width | 2.5-22 mm |
| Collector diameter | 100-700 mm |
| Part number | 4023373 |

The test is performed using two test probes with which the bars are contacted (bar method). The test can be performed directly between bar and bar or, for example, between ¼ of the commutator. The test is started via the start button in the test probe.

The test is evaluated at the end of the fully automatic test sequence, which guides the operator through the measurement. Alternatively,

testing can also be performed manually, without a fixed test step sequence. With both methods, the MTC2 R7 compares the surge curve with a previously stored reference during the measurement. This allows the user to directly fix any faults and repeat the test at these points.

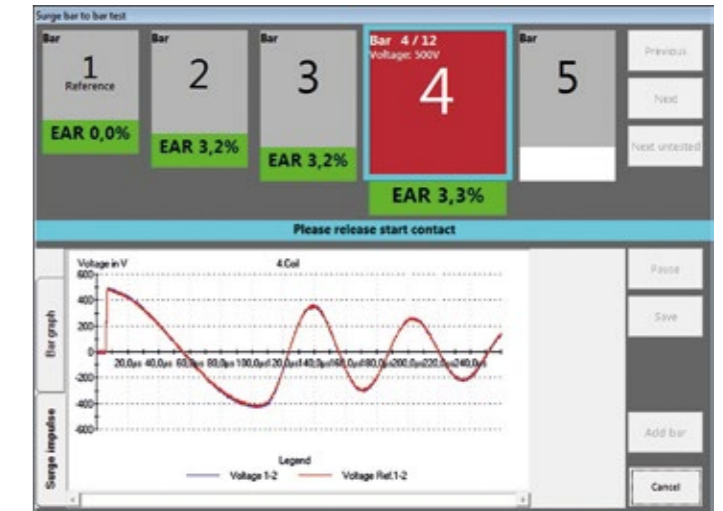

The software concept

It's all about the device under test

The user interface has been completely redesigned and is based on the latest .NET technology. The MTC2 R7 features modern and clear visualizations that enable intuitive operation.

The DUT database provides an optimum insight into every device under test created. In addition to an overview of the individual assigned parameters such as manufacturer, serial number and type, all test results are displayed as well.

- > New, modern .NET software
- > Win10 operating system | Win11 ready
- > Storage of all signal sequences
- > Playback functionality

With the full-text search, individual devices under test/device under test types with all the information assigned to them can be found quickly.

The screenshot displays the software interface for managing Device Under Test (DUT) data. It features a top navigation bar with 'Back', 'Save', 'Save as', 'New DUT', and 'Home' buttons. The main area is divided into two sections: a table of DUTs and a detailed 'DUT | Identification' panel.

| Manufacturer | Type | Serial number | Inventory nu... | Application | Location | Nominal pow |
|--------------|--------------------------|--------------------|-----------------|---------------------|----------|-------------|
| Menzel | MEBK315M-04-190 IE3 | 071640285145407001 | | | | 132 kW |
| VEM | IE4-W61R 280M 4 LL PT HW | 420319/0001 HW | | | | 90 kW |
| ABB | awGy800xa45 | AW 818 174 | | | | 5000 kW |
| | Stator EM235 | 185 | | | | 0 W |
| | Stator WP37 Abnahme | 5 | | Versuche für Kunden | | 0 W |
| | EN7895 | 643ae-345 | | Gepäckband C2 | | 0 MW |
| ABB | AMK 500L4A 2MW | 8010739 | 2164HF500 | | | 1.8 kW |
| | Stator Y 400V | 3852-01 | | | | 0 kW |
| SCHLEICH | 400V Motor | EN478-43 | | | | 90 kW |

The 'DUT | Identification' panel for the selected 'SCHLEICH 400V Motor' includes the following fields:


- Prüfung/Art: Stator 3P Y 400V
- Type: 400V Motor
- Serial number: EN478-43
- Manufacturer: SCHLEICH
- Application: [Empty]
- Inventory number: [Empty]
- Beschreibung: [Empty]
- Select type: type
- Location: [Empty]
- Select location: location
- Nominal voltage: 400 V
- Nominal current: 165 A
- Nominal power: 90 kW
- Nominal speed: 1487
- Nominal frequency: 50 Hz
- Power factor: 0
- Protection type: 55
- Installation place: 4

The 'Test plan assignment' section shows options to 'Assign test plan' and 'Create test', both with a 'test' button. Below is a table for test plan assignments:

| Test plan | Description |
|--------------------------|-------------|
| Stator Y 400V SCHLEICH_2 | |
| Stator Y 400V SCHLEICH_2 | |

The software can be used to store any number of devices under test/device under test types. Further information can now be assigned to these:

- Nameplate information
- Images of the nameplate or device under test
- Location information
- Logbook entries to document any kind of information
- Test results
- ...

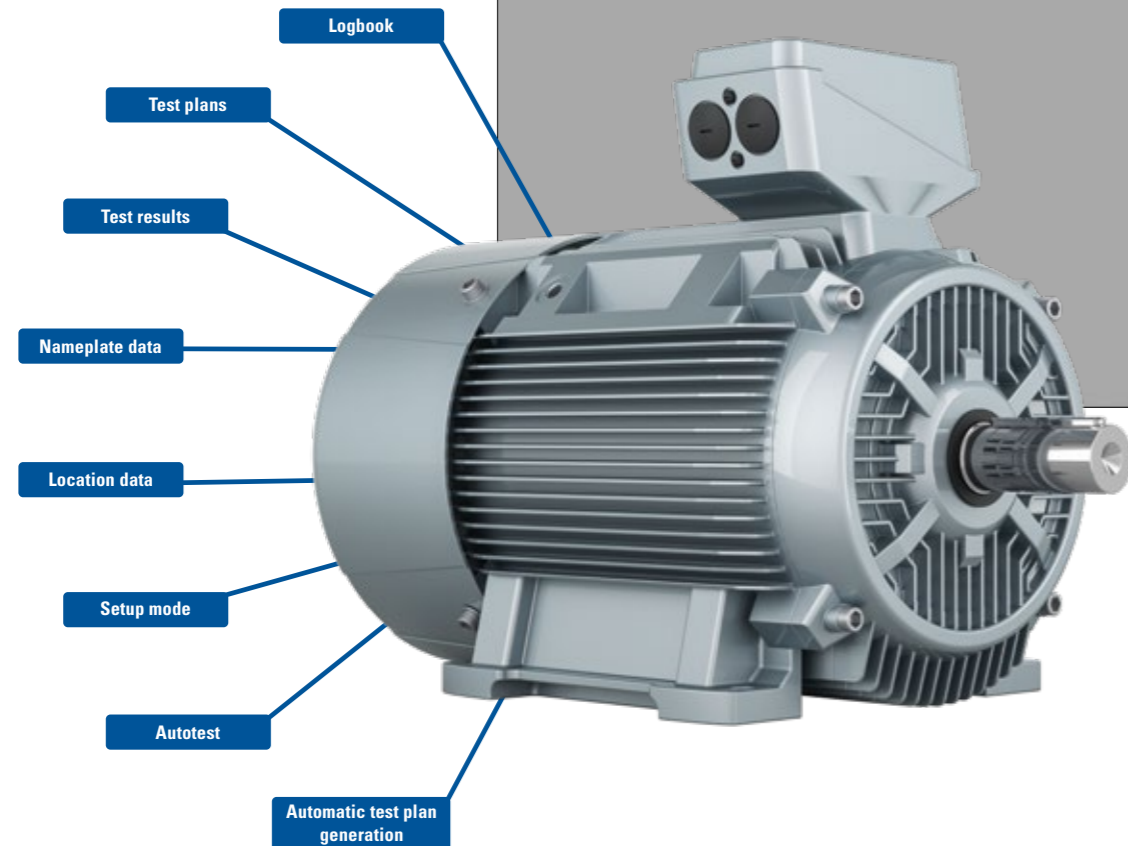

In this menu, several existing test plans can be assigned to a device under test or new test plans can be generated directly.

- One or more test plans, e.g:
 - Incoming inspection
 - Outgoing inspection
 - Type test
 - etc.
- Generation of new test plans with the test plan generator (Autotest)

The software features

Playback functionality


Tests that have already been carried out can be loaded 1:1 to enable further detailed evaluations, even if the test device is no longer connected to the device under test. All signal curves are saved for this purpose.

Example:

A partial discharge test involves a large number (hundreds) of pulses to determine the inception voltage, each pulse is saved with the corresponding partial discharge signal. The entire test sequence can thus be retraced and analysed again using the playback functionality.



Measurement function

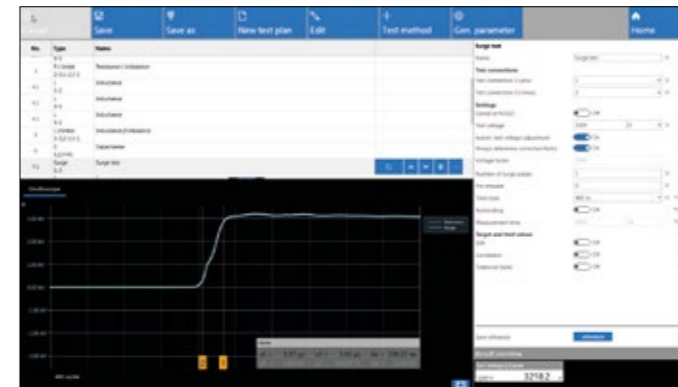

The oscilloscope feature is at its best. For each measurement, current, voltage and resistance curves are displayed not only as numerical values but also in the form of an oscillogram, if possible.

The „Measurement“ function can be used to place cursors at any point in the diagram in order to determine amplitudes, resistance values and times in the selected range


This allows for very precise determination of a resistance value at a specific point in time. It is also easy to determine the rise time of a surge voltage.

Setup mode


Test steps can be started at any time during the creation of the test plan. This enables the precise configuration of each test step.

Example:

The times for the ramp functions can be easily determined and transferred directly to the test step. Switching from test plan editing to test mode is a thing of the past.

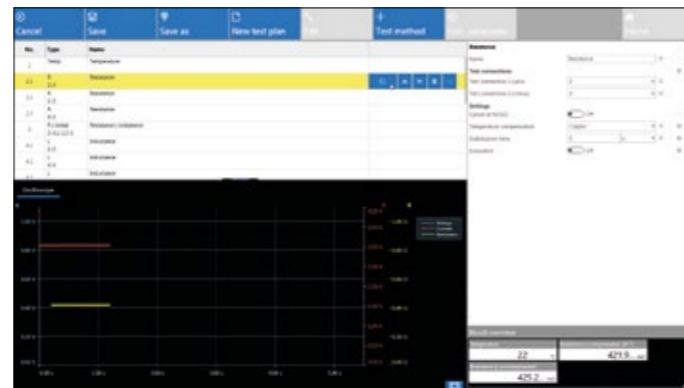

Autotest

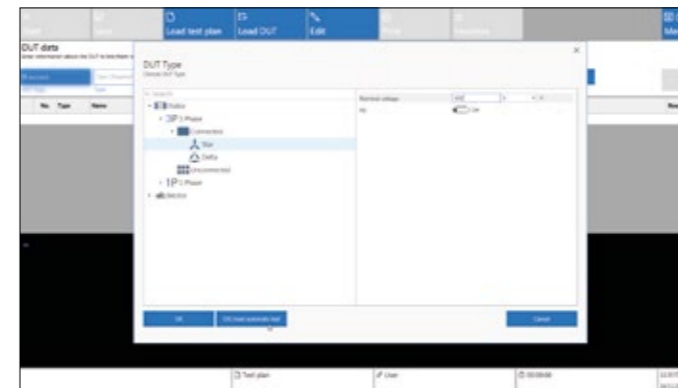

For the automatic test plan creation, only data that can be taken from the type plate needs to be entered into the software as well as the test methods required for the test.

The MTC2 R7 then automatically calculates the test target values for the test methods, taking into account the current standards. The calculation* is based on over 70 years of SCHLEICH experience in testing winding goods.


Making everyday testing easier. With SCHLEICH's know-how it is possible

* Calculation of the test voltage without guarantee!


User management

Custom „user roles“ can be assigned for each operator in user management. These user roles can be used to assign user rights from a central control point, e.g. for administrators or users who are allowed to change set values or only perform predefined test sequences. Operators are required to log in with their password.

Thanks to the Windows 10 operating system, almost any kind of input is supported: From keyboard to screen input, scanner or RFID – everything is possible.

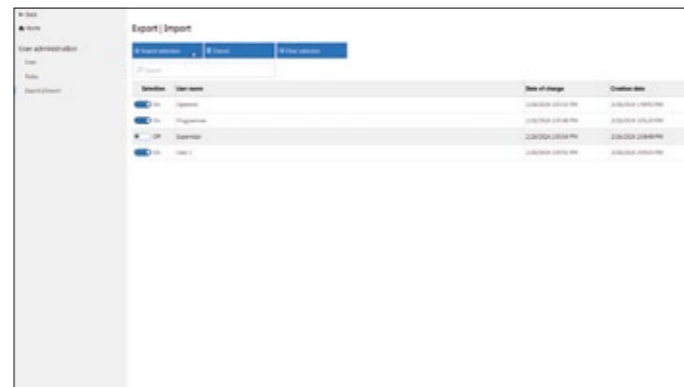

The full-text search

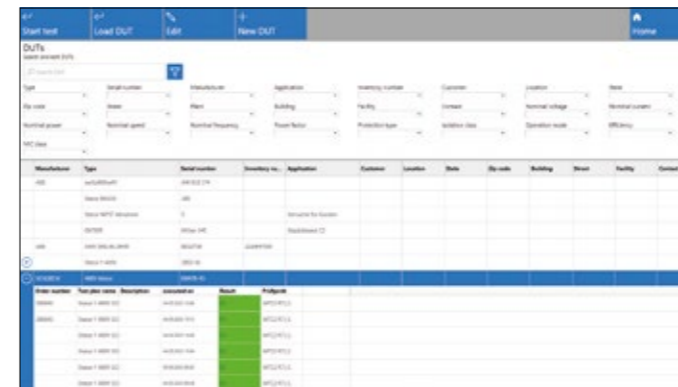

All results can be found again quickly at any time using the information previously entered. The built-in full-text search feature simplifies and accelerates the retrieval of results.

The test protocol

All test results can either be exported directly after the test or at a later time using the modern standard protocol.

The protocol language can be selected individually before creating the protocol. Default languages include German, English, Chinese, Czech, Danish, Dutch, French, Hungarian, Italian, Polish, Portuguese, Slovenian, Spanish, Swedish.

Your Logo

Sample Company Ltd
 Sample Street 89
 12345 Sample City

PRÜFPROTOKOLL

| | |
|----------------|--------------------------|
| Prüfart | SCHLEICH MTC2 R7 |
| Serialnummer | 1 |
| Kalibrierdatum | 29.09.2022 |
| Programmname | Stator Y 480V SCHLEICH_2 |
| Fehler | 0 |

| | | |
|-------------------------------|------------|--|
| Prüfung OUT | | |
| Typ | 400V Motor | |
| Serialnummer | EN478-43 | |
| Hersteller | SCHLEICH | |
| Nennstrom (I _{nom}) | 1487 | |
| Leistungsfaktor | 0 | |
| Schubart | 55 | |
| Isolationklasse | 4 | |
| Betriebsart | 51 | |
| Nennstrom | 185 A | |
| Nennleistung | 90 kW | |
| Nennspannung | 400 V | |
| Wirkungsgrad | 97 % | |
| Nennfrequenz | 50 Hz | |

| | | | | |
|-----------------|------------------------|-----------|--|--|
| Zusammenfassung | | | | |
| Temp | Prüfbedingung | Istwert | | |
| R | Resistance | 75.667 mΩ | | |
| R | Resistance | 75.871 mΩ | | |
| R | Resistance | 75.811 mΩ | | |
| Scatter R | Resistance Unbalance | 77.788 mΩ | | |
| L | Inductance | 1.288 mH | | |
| L | Inductance | 1.27 mH | | |
| L | Inductance | 1.284 mH | | |
| Scatter L | Inductance Unbalance | 1.284 mH | | |
| C | Capacitance | 5.265 nF | | |
| Surge | Surge | 1.5 % | | |
| Surge | Surge | 1.4 % | | |
| Surge | Surge | 1.5 % | | |

| | | | | | |
|-----------|-----|-------------|---------------|---------------------|----------|
| Messwerte | | | | | |
| Nr. | Typ | Bezeichnung | Prüfbedingung | Sollgrenzwert | Istwert |
| 9 | C | Capacitance | 1,2,3k1 | 4.65 nF ... 5.72 nF | 5.265 nF |

| | | | | | |
|----------------------|-------|-------------|---------------------|---------------|---------|
| Stufspannungsprüfung | | | | | |
| Nr. | Typ | Bezeichnung | Prüfbedingung | Sollgrenzwert | Istwert |
| 10 | Surge | Surge | Test Voltage 3000 V | EAR ± 10 % | 1.5 % |

Customizable section with your company logo and address

The title page with customizable section, the general data of the device under test and the overview of the measurement results. On the following pages, the detailed measurement results of the individual test steps are depicted.

Protocol options

• Paper printout

Any Windows® 10 compatible printer can be connected to the MTC2 R7. As is standard in Windows®, only one click on the print icon is required and all test results are automatically printed.

• Creating a CSV file (optional)

Optionally, the MTC2 R7 can also generate a CSV file after a test sequence. The file can be stored on any network directory. The data to be transferred to the CSV file are customizable and can be adapted to your requirements.

• Generating a PDF file

The MTC2 R7 can generate a PDF file that can be stored on a USB drive, the internal hard disk or on any network directory. Storing on the USB drive is done automatically into the root directory. No "copy and paste" in Windows® is required.

- Direct printing on a Windows® compatible printer
- Creation of a PDF or CSV file
- Reporting in accordance with IEC 61934

The MTC2 R7 in a network

Test plans and test results can be stored locally or alternatively on a central server. This guarantees a high level of security for your data as well as optimized data sharing between different test systems.

The MTC2 R7 is perfectly suited to operate in all network infrastructures, including its standard version. It offers the ideal platform for collecting, managing, analyzing and distributing information.


Tried and tested popular technologies from Microsoft® serve as the foundation for the database.




- > Central storage of the test plans and results
- > Local editing of test plans and evaluation of test results on the MTC2 R7 or on workstations
- > Operation in global networks
- > Optimized for remote maintenance

Network failure


1 Each test device automatically saves local copies of the latest server test plan database so that it can continue to operate in the event of an eventual network failure.

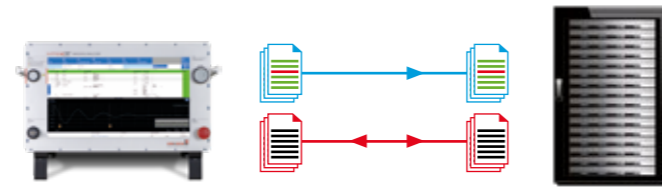

2 In the event of a network failure, the local test plans are used and the test results are stored locally on the test device.

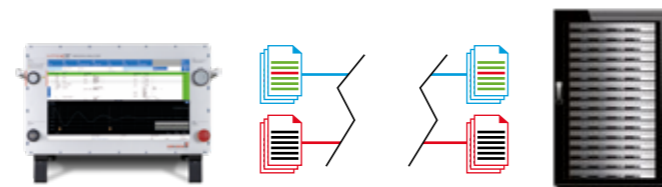

3 After the network connection is re-established, the test device automatically transfers the test results back to the server ensuring that the server database is up to date again.

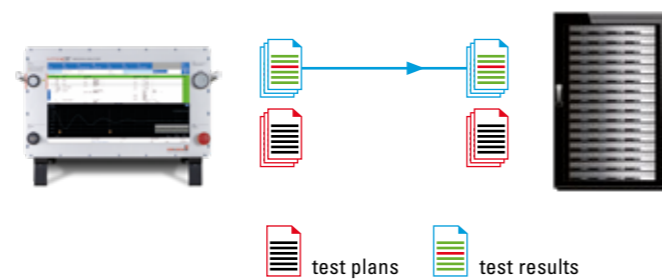


Import and export of test plans and user data

All device under test data, test plans, test results and user information can be efficiently synchronised across multiple test devices. The import and export of this data is particularly relevant in network operation.

Storage directories in the network as well as the hard drive of the PC in the test device or various types of removable storage media can be used for this purpose.


When importing or exporting user data, the defined authorizations of the individual users, the so-called „user roles“, are also automatically included.

Test plan versions management also make it possible to check if test plans are up to date straight away. This ensures that all test devices in a network always have the latest data regarding test plans and authorized users, irrespective of their location. New test devices can be set up quickly and data be restored.

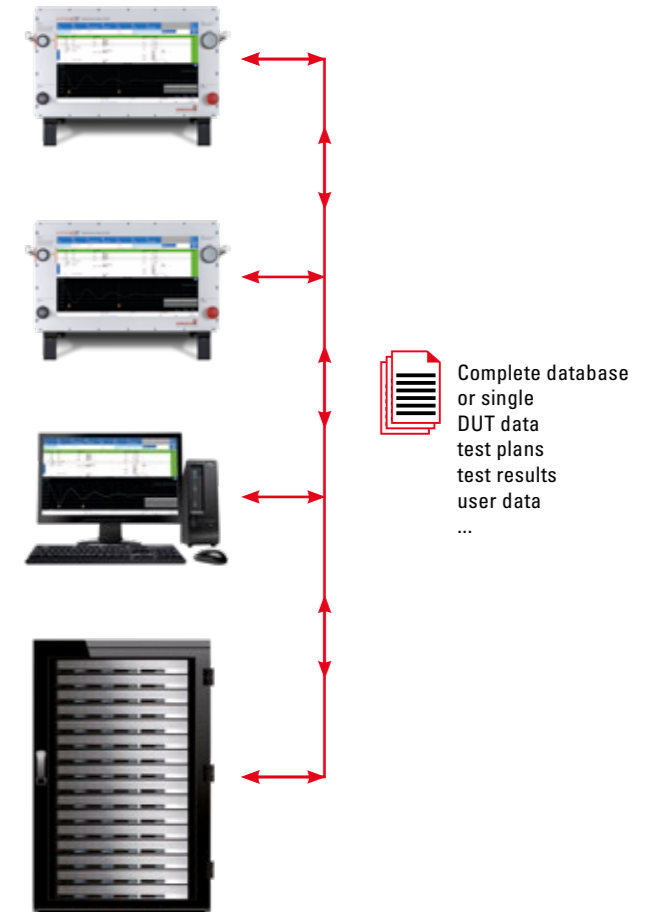

Product overview

6 kV, 12 kV and 15 kV

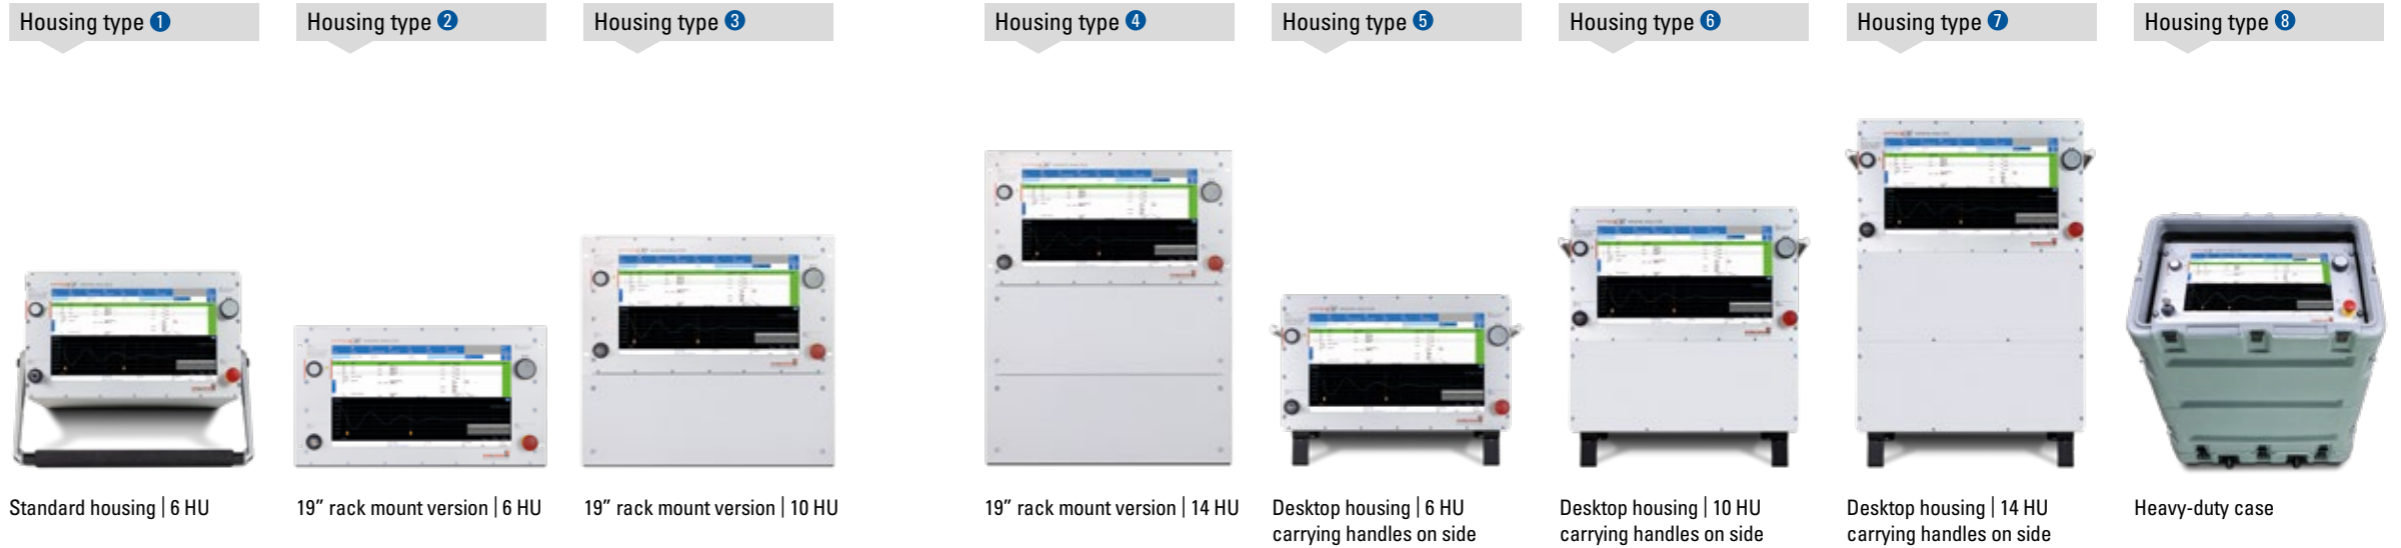

| | 6 kV | | | 12 kV | | | 15 kV | | |
|--------------------------------------|-----------------------|-----------------------|-------------------------|-----------------------|-----------------------|--------------------------|-----------------------|-----------------------|--------------------------|
| | MTC R76 kV R | MTC R76 kV RLC | MTC R76 kV RLC HVAC | MTC R712 kV R | MTC R712 kV RLC | MTC R712 kV RLC HVAC | MTC R715 kV R | MTC R715 kV RLC | MTC R715 kV RLC HVAC |
| Standard housing type | 1 | 1 | 6 | 1 | 1 | 6 | 1 | 1 | 6 |
| Optional housing type | 2 5 8 | 2 5 8 | 3 8 | 2 5 8 | 2 5 8 | 3 8 | 2 5 8 | 2 5 8 | 3 8 |
| Winding connections | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| 4 additional winding connections | ○ Housing type 3 or 6 | ○ Housing type 3 or 6 | ○ Housing type 4 or 7 | ○ Housing type 3 or 6 | ○ Housing type 3 or 6 | ○ Housing type 4 or 7 | ○ Housing type 3 or 6 | ○ Housing type 3 or 6 | ○ Housing type 4 or 7 |
| Ground connection | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Surge voltage 100 nF | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Surge capacitance 200 nF | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Partial discharge with surge voltage | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Resistance | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Insulation resistance PI/DAR | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Step voltage | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| High voltage DC | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| High voltage AC 6 kV 100 mA | - | - | ● | - | - | ● | - | - | ● |
| Inductance | - | ● | ● | - | ● | ● | - | ● | ● |
| Capacitance | - | ● | ● | - | ● | ● | - | ● | ● |
| Sense of rotation | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Visual inspection | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| External accessories | | | | | | | | | |
| Armature booster ready | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| VoltageAnalyzer ready | ● | ● | ● | ● | ● | ● | ● | ● | ● |

● Standard model
○ Optional at extra costs
- Not available

R: Resistance
RLC: Resistance | Inductance | Capacitance
HVAC: High voltage AC

Product overview

25 kV, 30 kV, 40 kV and 50 kV



| | 25 kV | | 30 kV | | 40 kV | | 50 kV | |
|--------------------------------------|---------------------|-------------------|---------------------|-------------------|---------------------|-------------------|---------------------|-------------------|
| | MTC R725 kV SURGE | MTC R725 kV RLC | MTC R730 kV SURGE | MTC R730 kV RLC | MTC R740 kV SURGE | MTC R740 kV RLC | MTC R750 kV SURGE | MTC R750 kV RLC |
| Winding connections | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| 3 rd Winding connection | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Ground connection | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Measuring connections pluggable | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Surge voltage 100 nF | ● | ● | ● | ● | ● | ● | ● | ● |
| Surge capacitance 200 nF | – | – | – | – | – | – | – | – |
| Partial discharge with surge voltage | – | – | – | – | – | – | – | – |
| Resistance | ○ | ● | ○ | ● | ○ | ● | ○ | ● |
| Insulation resistance PI/DAR | ● | ● | ● | ● | ● | ● | ● | ● |
| Step voltage | ● | ● | ● | ● | ● | ● | ● | ● |
| High voltage DC | ● | ● | ● | ● | ● | ● | ● | ● |
| High voltage AC 6 kV 100 mA | – | – | – | – | – | – | – | – |
| Inductance | ○ | ● | ○ | ● | ○ | ● | ○ | ● |
| Capacitance | ○ | ● | ○ | ● | ○ | ● | ○ | ● |
| Sense of rotation | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Visual inspection | ● | ● | ● | ● | ● | ● | ● | ● |

- Standard model
- Optional at extra costs
- Not available

SURGE: Surge voltage
 RLC: Resistance | Inductance | Capacitance

Accessories

Kelvin clamp | sturdy design

Sturdy 4-wire Kelvin clamps for high-precision resistance tests. The standard measuring leads can be plugged on the Kelvin clamps.



| Type | small | medium | large |
|--------------------------|--------------------------------------|--|------------------------------------|
| Opening width | 10 mm/0.4 inch | 20 mm/0.8 inch | 33 mm/1.3 inch |
| Pressure intensity | 20 N | 30 N | 100 N |
| 4-wire-technology | yes | yes | yes |
| Measuring lead pluggable | yes | yes | yes |
| Dimensions (L x H x W) | 90 x 35 x 13 mm/3.5 x 1.4 x 0.5 inch | 165 x 41(65) x 20 mm/6.5 x 1.6(2.6) x 0.8 inch | 255 x 95 x 25 mm/10 x 3.7 x 1 inch |
| Part number | 4023184 | 4023122 | 4023109 |

Motor terminal plug



The motor terminal plugs enable quick contacting of 6-, 8- or 9-pole motor terminal boards. The individual types are designed to match the motor-side connection threads from M4 to M10. Different versions are available for each type due to the different distances between the threaded bolts.

The motor test plugs are available in three sizes.

You can find further information on our website: www.schleich.com/en/product/motor-terminal-plugs-en

Foot switch to start the test



| | |
|-------------|------------|
| Lead length | 2 m/6.6 ft |
| Part number | 4010611 |

Warning and Result lights



The LED warning light indicates the following conditions:
Green= high voltage switched off
Red= high voltage switched on

| | |
|-------------|--------------|
| Indications | red/green |
| Lead length | 1.8 m/5.9 ft |
| Part number | 40004858 |



The LED result light indicates the following conditions:
Green= test GO
Red= test NOGO

| | |
|-------------|--------------|
| Indications | red/green |
| Lead length | 1.8 m/5.9 ft |
| Part number | 40004861 |

Two-hand start



| | |
|-------------|---------|
| Lead length | 2 m |
| Part number | 4023716 |

Emergency stop



| | |
|-------------|----------|
| Lead length | 2 m |
| Part number | 40106085 |


Rotary field probes



| | Part number |
|---|-------------|
| Static rotary field probe for micromotors | 4007215 |
| Static rotary field probe, medium housing | 4007207 |
| Static rotary field probe, large housing | 4000305 |

| Connection cables | Part number |
|----------------------|-------------|
| 4-pole, length 0.5 m | 4000261 |
| 4-pole, length 1 m | 40001929 |
| 4-pole, length 2 m | 40002081 |
| 4-pole, length 3 m | 40001930 |
| 4-pole, length 4 m | 40003541 |

Test dummy | Blackbox

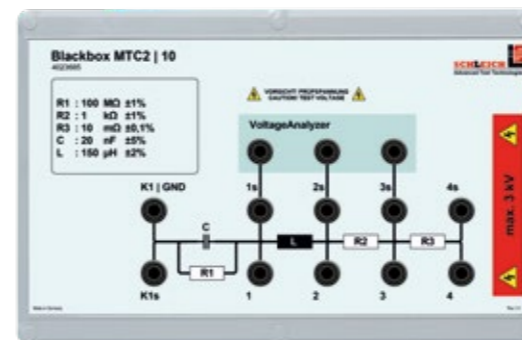

Daily verification of the test device using a black box to simulate „GO/NO GO“ conditions gives you the safety of knowing that your test device is operating perfectly and that you are delivering products that have been tested properly. Our black boxes can be used as set value dummies or GO/NO GO test dummies.

Set value test dummy for simulation of tests
When the test device is checked with this black box, it measures the set value of the respective test method within a very tight \pm tolerance. If the test result is out of the tolerance limits, a fault is present.

The GO/NO GO black box simulates tests with and without faulty conditions. For each test method a GO and NO GO test result is simulated.

| | Part number |
|-------------------------------------|-------------|
| Blackbox MTC2 10 | 4023685 |
| Blackbox for partial discharge test | 40003448 |

> You can find our entire range of accessories on our website.


Accessories

Test cover model 13 R2



| | |
|--------------------------------|------------------------|
| Overall dimensions (W x D x H) | 620 x 782 x 515 mm |
| Inside dimensions (W x D x H) | 458 x 600 x 350 mm |
| Integrated result lights | optional |
| Test voltage at surge test | max. 16 kV |
| Test voltage | max. 12 kV AC/16 kV DC |
| Safety | CAT IV |
| Part number 6 kV AC/8 kV DC | 40003897 |
| Part number 12 kV AC/16 kV DC | 40004256 |

Test cover model 10

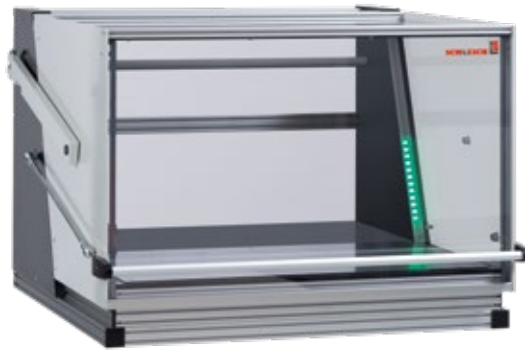

| | |
|--------------------------------|---|
| Overall dimensions (W x D x H) | 935 x 880 x 585 mm/36.8 x 34.7 x 23 inch |
| Inside dimensions (W x D x H) | 800 x 810/730 x 500 mm/31.5 x 34.2/28.7 x 23 inch |
| Integrated result lights | 2 pcs. (1 x GO/ 1x NO GO) |
| Test voltage | max. 8 kV AC |
| Safety | CAT IV |
| Part number | 400281 |

Rolling tables



| Overall dimensions (Wx Dx H) | 700 x 870 x 1010 mm | 700 x 870 x 1010 mm |
|------------------------------|-------------------------|-------------------------|
| | 27.6 x 34.2 x 39.8 inch | 27.6 x 34.2 x 39.8 inch |
| Drawer | no | yes |
| Additional shelf | no | yes |
| Base plate | no | yes |
| Castors | yes | yes |
| Castor diameter | 120 mm/4.7 inch | 120 mm/4.7 inch |
| Push handle | yes | yes |
| Part number | 124.982.0 | 124.981.0 |

› **Note:** The rolling tables can also be customized according to your specifications.

Transport case



- Solid outdoor case
- Ideal for wind turbines, military, on-site service in the field etc.

| | |
|------------------------|--|
| Model MTC2 R7 | 6 kV/12 kV/15 kV |
| Castors | yes |
| Shock absorber | yes |
| Color | black |
| Weight (tare) | 20.5 kg/45,19 lbs |
| Dimensions (W x D x H) | 700 x 850 x 450 mm/27.5 x 33.4 x 17.7 inch |
| Part number | 4023116 |

Interfaces and fieldbus

- Remote control of the tester via e.g. a PLC
- Read-out of test results
- Transfer of order data



The indicated logos are registered trademarks of the respective companies. | * optional

| | Part number |
|----------------|-------------|
| RS232 | 4023454 |
| ProfiNet | 4023656 |
| EtherCAT | 4023657 |
| WLAN/Bluetooth | 40004840 |

Connection extension to 8 winding connections

| | |
|-------------------|-------------|
| Test voltage | max. 15 kV |
| Surge current | max. 2000 A |
| 4-wire-technology | yes |
| Part number | 4023270 |

› You can find our entire range of accessories on our website.

Another word for "Made in Germany": SCHLEICH



Comprehensive production facilities allow designing and manufacturing almost all tester components at our site in Hemer.

For example, our measuring and electronic PCBs are produced with an ultra-modern in-line-SMD-placement system, which assures a stable quality of our products.

Modern high-end processors in our testers process the test tasks in a fast, precise and reliable manner. With our modern CNC-machines, we also design and manufacture a great number of accessory components such as test covers, contacting units, workpiece carriers with DUT-holders or robot gripping tools as well as complete automatic production lines.

Whatever you want to test... ...SCHLEICH has the solution!

SCHLEICH is a leading system provider in the area of testing motors and windings. Our extensive range of products allows us to provide you with testers, test systems and complete production lines for almost every test task.

Decades of experience, listening to our customers and satisfying their wishes – facing individual tasks with technical creativity and realize them in a team of highly skilled engineers and designers – this is what we do. This is SCHLEICH.

Every single one of our more than 145 employees works on guaranteeing and optimizing the high quality standard of our testing devices each and every day. Our customers, our sales department, our motivated engineers and manufacturing staff – with their ideas and suggestions for improvement they are all part of the innovation process.



Service without limits. We are there for you – wherever you are.







First-class customer service is our top priority. From detailed consulting during the planning phase to training and After-Sales-Service – we support you during the entire process.

In training sessions adapted to your requirements, our technicians will teach you the necessary know-how allowing you to avail yourself of the functional variety of our testing devices to the full extent. Should there be questions or technical problems, our technical support team will assist you by phone, on-line or on-site fast and reliably. Constant software updates and extensions make sure that you can always work with state-of-the-art test software. The periodic calibration of test equipment is an essential precondition for quality assurance. We calibrate your test equipment according to standards – on site or via remote maintenance.

It goes without saying that we calibrate in accordance with national and international standards. Our Service Centers support you around the world – with dedication, competence and reliability.

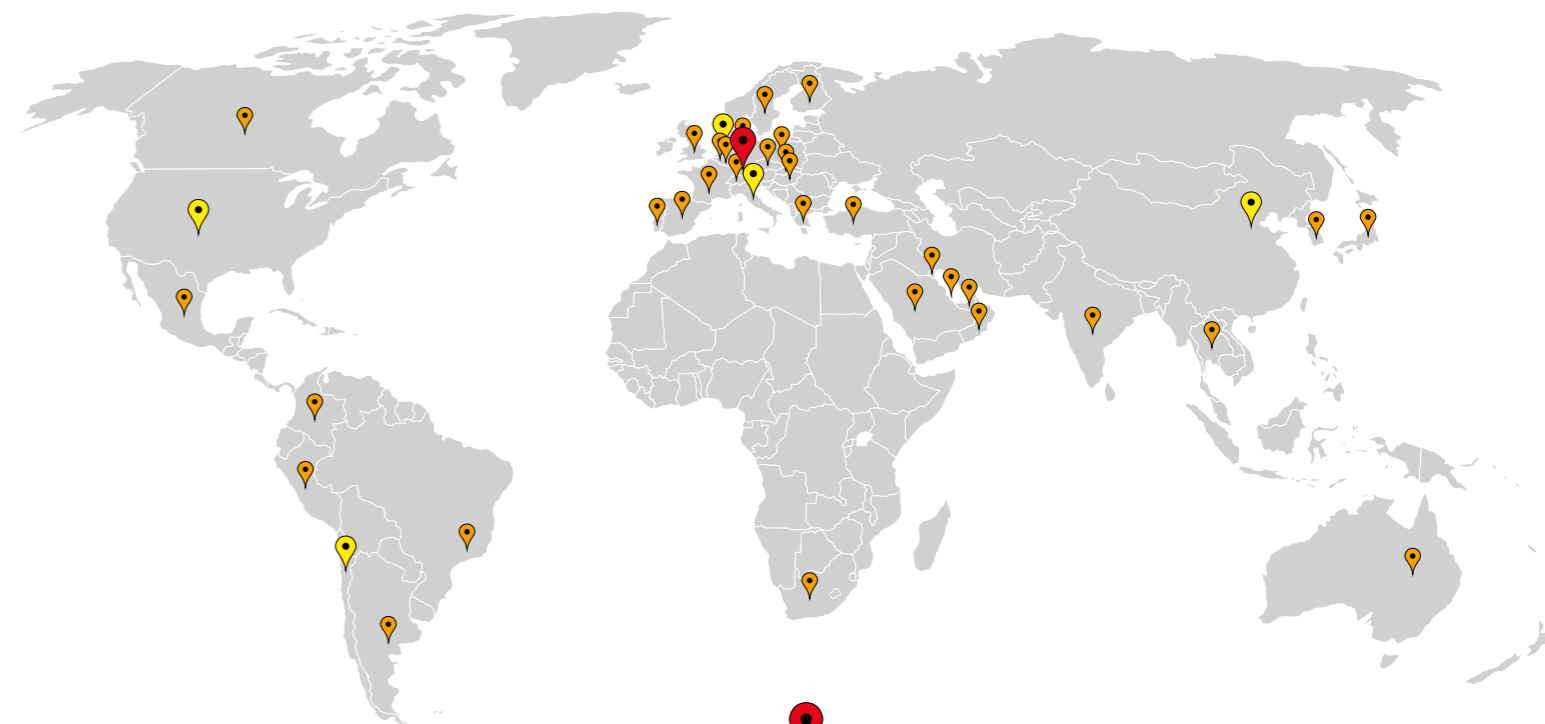Sales and Service Centers



-  Production, Headquarters & Sales Center Germany
-  Sales and Service Centers
-  Sales Centers

Expect more!

Whatever you want to test, SCHLEICH has the solution! As a leading supplier of electric safety and function test systems as well as motor and winding testers we offer solutions for any task in this sector. Our owner-managed company, founded more than 70 years ago, is present in over 40 markets all around the globe.

Test devices for electric motors and windings



MotorAnalyzer3
Universal tester for electric motors and windings



MTC2 R7
Multi-purpose winding testers



VoltageAnalyzer
Accurate surge measurement directly at the winding



EncoderAnalyzer
For testing encoders



Dynamic-MotorAnalyzer
Online Monitoring of electric motors




MTC3
Multi-purpose winding testers for motor production



GLP3-M
Multi-purpose motor testers



Thermal-bonding machines, impregnation & resistive-heating systems



Test covers, test cabins and protection devices
Personal protection against dangerous test voltages

Electrical safety- and function testers



Handheld
Mobile multi-purpose testers



GLP1-g
Safety, function and high-voltage testers



GLP2-BASIC
Safety, function and high-voltage testers



GLP2-MODULAR
Safety, function and high-voltage testers



GLP3
Multi-purpose Windows®-testers



SCHLEICH GmbH
An der Schleuse 11
58675 Hemer | Germany
Phone +49 (0) 2372 9498-9498
Fax +49 (0) 2372 9498-99
info@schleich.com
www.schleich.com



Presented by:

