

## CBA4K400M-100E

### 4 KHz to 400 MHz 100 Watt Class A Solid State Amplifier




Designed specifically for automotive, military and aerospace BCI EMC testing, this mismatch tolerant Class A amplifier delivers power continuously into the varying match typically associated with this type of testing.

The Class A design ensures a high reliability, low distortion linear performance across the frequency range. This design also ensures that the amplifier will continue to operate at full power even when presented with an open or short circuit at its output.

#### MAIN FEATURES

- Class A Operation
- Ethernet Remote Control
- 3 Year Warranty
- Ideal for BCI Testing

The unit is powered from a switched mode power supply for high efficiency, high power factor and wide voltage range operation. The unit is air-cooled with integral fans, and is protected against faulty cooling by excess temperature sensing. A safety interlock connector is provided, which the user can short circuit to ground, to put the amplifier into standby mode. Front panel indicators are provided to indicate over-temperature and rf interlock operation.

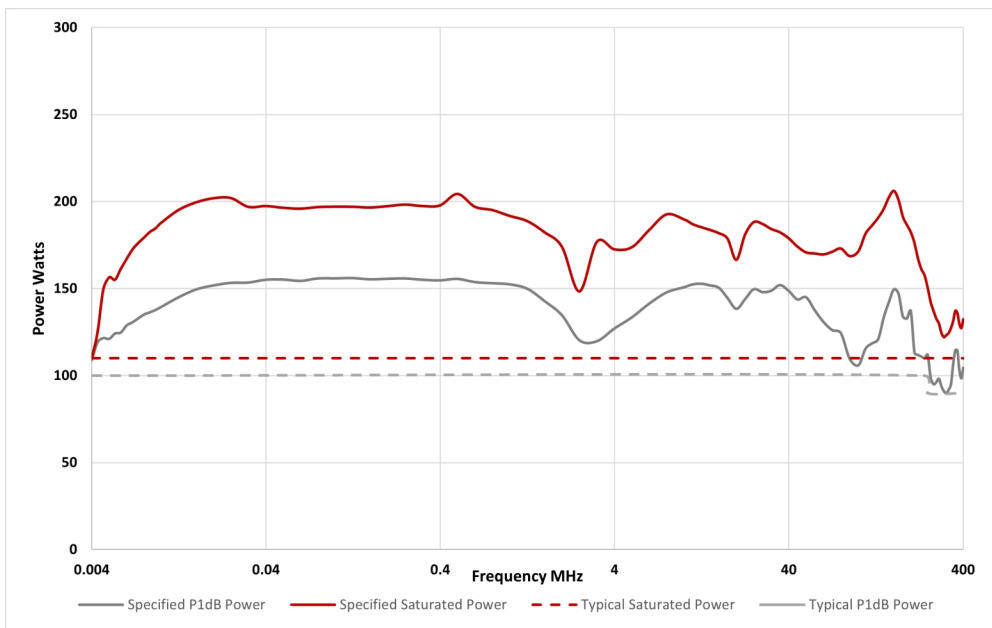

## Technical Specifications

Frequency Bands	Single Band
Frequency (min.) kHz	4 kHz
Frequency (max.) MHz	400 MHz
Psat (min)	110 W
P1dB	4KHz to 250MHz 100W / 250MHz to 400MHz 90W
Small Signal Gain	50 dB
Gain Variation (max) ±	+/- 2.0 dB
Harmonics @ P1dB (typ)	-20 dBc
Spurious (min.)	-70 dBc
Modulation Formats	AM, FM, Pulse
Maximum Input Power (no damage)	10 dBm
Output VSWR Tolerance	Infinite any phase (no foldback)
Stability	Unconditional
Output Impedance	50 Ohm
Input VSWR	2:1 (max)
Output VSWR	2:1 (typical)

## General Specifications

Safety Interlock	Via rear panel mounted BNC-female
Supply Voltage	90 to 264 VAC
Supply Frequency	47 to 63
Supply Power (typ.)	1 kVA
RF Input Connector	Type N female
RF Output Connector	Type-N Female
Weight kg	18 kg
Dimensions (WxHxD)	19 inch, 3U, 360mm
Cooling System	Air Cooled, Self-contained

## Availabe Variants

Product	Configuration	Item #
CBA4K400M-100E-001	Rack mount Case with Front Panel RF Connectors	3-342608
CBA4K400M-100E-002	Rack Mount Case with Rear Panel RF Connectors	3-342609
CBA4K400M-100E-007	Table Top Case with Front Panel RF Connectors	3-342610
CBA4K400M-100E-008	Table Top Case with Rear Panel RF Connectors	3-342611